

Main

Range of product	Canalis
Product name	KS
Product or component type	Multiple elbow
Busbar description	Fire barrier
Device application	Change direction
[Ie] rated operational current	100 A at 35 °C 160 A at 35 °C 250 A at 35 °C
Direction change type	Direction 1: edgewise to downward - neutral to up Direction 3: flat to left - neutral to right

Complementary

[Ue] rated operational voltage	230...690 V
Network frequency	50/60 Hz
Dimension type	Made to measure
Operating angle	90 °
Mounting mode	By screws
Electrical connection	Lubricated sliding contact
Standards	IEC 61439-6 IEC 60439-2
Width	147 mm
Length	Side 3: 250...695 mm Side 1: 250...745 mm
Colour	White (RAL 9001)
Net weight	8.4 kg

Environment


IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	44 kg
Package 1 Height	77.5 cm
Package 1 width	77.9 cm
Package 1 Length	92 cm

Contractual warranty

Warranty	18 months
----------	-----------

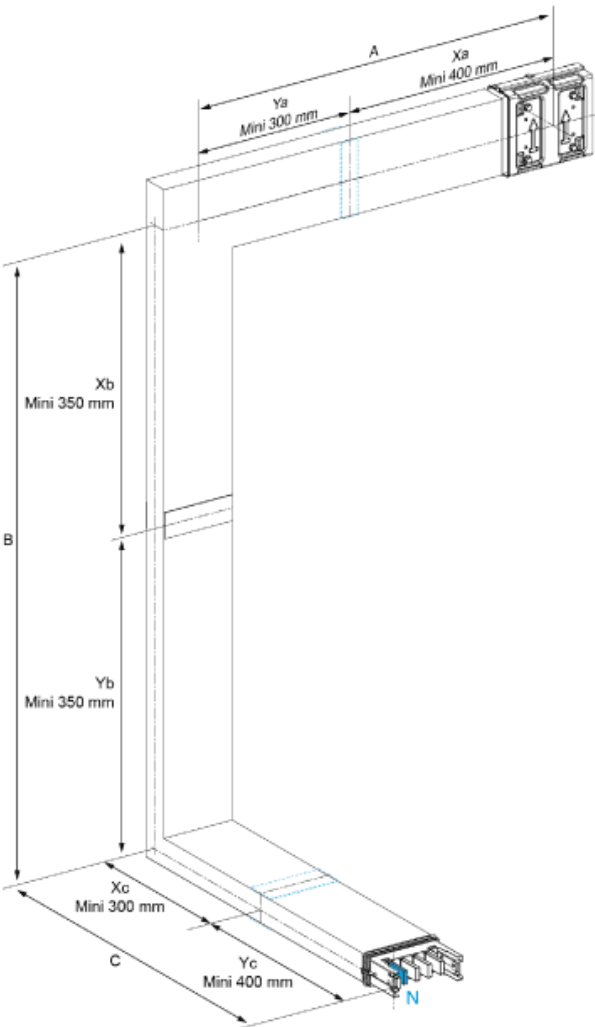

Dimensions		KSA250DMCK4CF
A (mm)	-	
B (mm)	-	
C (mm)	-	
D (mm)	-	
Fire barrier	Yes	
Fire barrier position	Either on side A or B or C	