

### Main

Range of product	Canalis
Product name	KS
Product or component type	Multiple elbow
Busbar description	Fire barrier
Device application	Change direction
[Ie] rated operational current	500 A at 35 °C 630 A at 35 °C
Direction change type	Direction 1: edgewise to upward - neutral to down Direction 3: flat to left - neutral to right

### Complementary

[Ue] rated operational voltage	230...690 V
Network frequency	50/60 Hz
Dimension type	Made to measure
Operating angle	90 °
Mounting mode	By screws
Electrical connection	Lubricated sliding contact
Standards	IEC 61439-6 IEC 60439-2
Width	167 mm
Depth	118 mm
Length	Side 1: 290...785 mm Side 3: 290...785 mm
Colour	White (RAL 9001)
Net weight	18 kg

### Environment


IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262

### Packing Units

Package 1 Weight	24.000 kg
Package 1 Height	8.450 dm
Package 1 width	9.400 dm
Package 1 Length	8.690 dm

### Contractual warranty

Warranty	18 months
----------	-----------

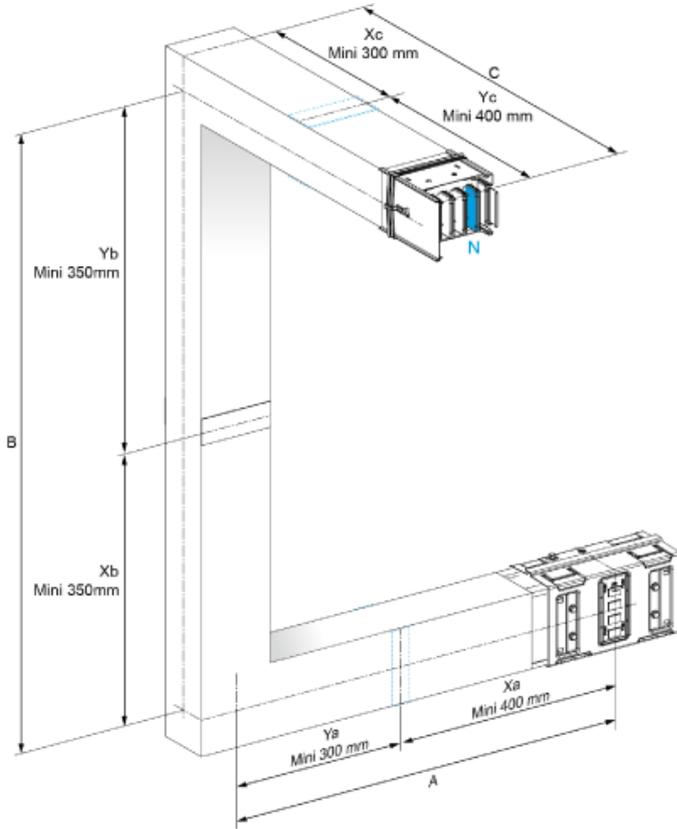

**Dimensions**

KSA630DMCL4CF

A (mm)	-
B (mm)	-
C (mm)	-
D (mm)	-
Fire barrier	Yes
Fire barrier position	Either on side A or B or C