

Main

Range of product	Canalis
Product name	KS
Product or component type	Zed elbow
Busbar description	Fire barrier
Device application	Change direction
[Ie] rated operational current	100 A at 35 °C 160 A at 35 °C 250 A at 35 °C
Direction change type	Direction 1: edgewise to upward - neutral to up Direction 1: edgewise to downward - neutral to up

Complementary

[Ue] rated operational voltage	230...690 V
Network frequency	50/60 Hz
Dimension type	Made to measure
Operating angle	90 °
Electrical connection	Lubricated sliding contact
Mounting mode	By screws
Standards	IEC 60439-2 IEC 61439-6
Width	147 mm
Depth	46 mm
Length	Side 1: 200...695 mm Side 3: 250...745 mm
Colour	White (RAL 9001)
Net weight	8.4 kg

Environment

IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262

Packing Units

Package 1 Weight	34.450 kg
Package 1 Height	0.630 dm
Package 1 width	9.670 dm
Package 1 Length	14.900 dm


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 Yes

China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Halogen content performance	Halogen free product

Contractual warranty

Warranty	18 months
----------	-----------

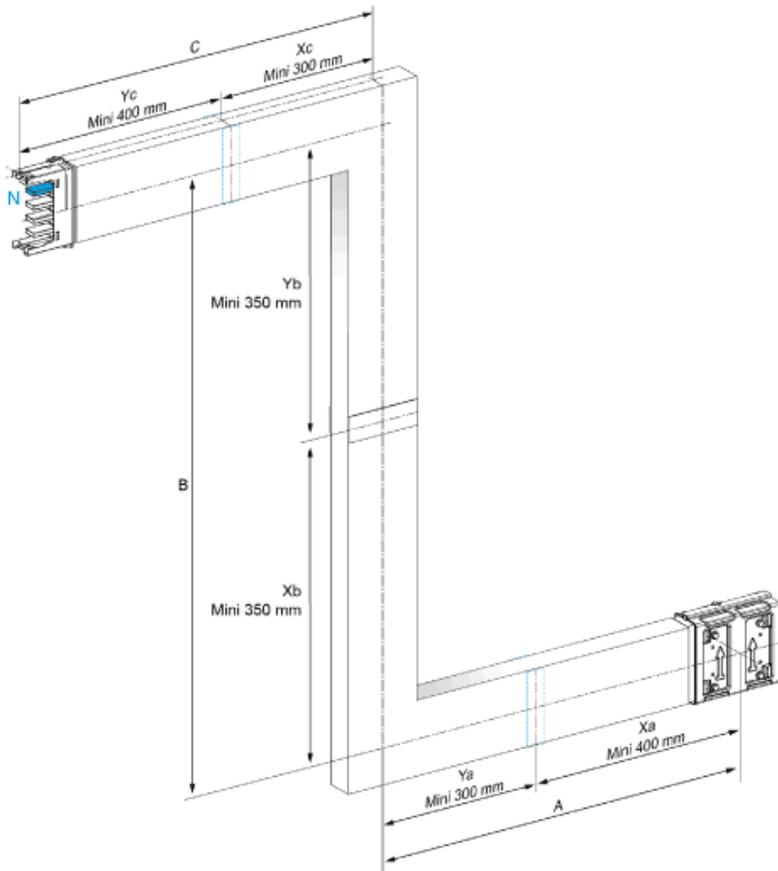

Dimensions		KSA250DZE4CF
A (mm)	-	
B (mm)	-	
C (mm)	-	
D (mm)	-	
Fire barrier	Yes	
Fire barrier position	Either on side A or B or C	