



Main

Range of product	Telemecanique Cabling components
Accessory / separate part category	Cabling accessories
Accessory / separate part type	Connector
Electrical connection	Straight female connector M18, 4 pins
Collar material	Plastic
Status LED	Without
Cable connection	Screw terminal / wire size <1.5 mm ² / clamping capacity 5...8 mm

Complementary

Cable gland type	Pg 9
Cable connector fixing	Screw-on
[Ue] rated operational voltage	250 V AC
[In] rated current	16 A
Enclosure material	Plastic
Minimum insulating resistance	1000 GΩ
Contact resistance	10000 μOhm
Net weight	0.035 kg

Environment

IP degree of protection	IP65
Ambient air temperature for operation	-40...85 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	26 g
Package 1 Height	3 cm
Package 1 width	4.3 cm
Package 1 Length	8.6 cm
Unit Type of Package 2	S01
Number of Units in Package 2	100
Package 2 Weight	2.836 kg
Package 2 Height	15 cm
Package 2 width	15 cm
Package 2 Length	40 cm


Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

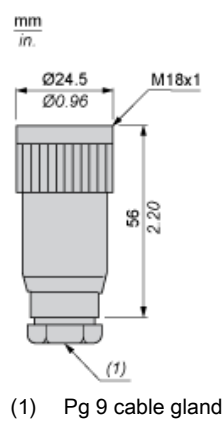

Connections and Schemes

