



## Main

Range of product	Telemecanique Cabling components
Accessory / separate part category	Cabling accessories
Accessory / separate part type	Connector
Electrical connection	Straight male connector M8, 3 pins
Collar material	Metal
Status LED	Without
Cable connection	Vampire clip / wire size <math><0.25 \text{ mm}^2</math> / clamping capacity 5 mm

## Complementary

Cable gland type	M9.5
Cable connector fixing	Screw-on
[Ue] rated operational voltage	60 V AC 75 V DC
[In] rated current	4 A
Enclosure material	Plastic
Minimum insulating resistance	1 G $\Omega$
Contact resistance	5000 $\mu\text{Ohm}$
Net weight	0.01 kg

## Environment

IP degree of protection	IP67
Ambient air temperature for operation	-40...85 °C

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	12 g
Package 1 Height	2 cm
Package 1 width	8.4 cm
Package 1 Length	12.5 cm
Unit Type of Package 2	BAG
Number of Units in Package 2	1
Package 2 Weight	12 g
Package 2 Height	2 cm
Package 2 width	8.4 cm
Package 2 Length	12.5 cm
Unit Type of Package 3	S01
Number of Units in Package 3	20
Package 3 Weight	440 g
Package 3 Height	15 cm
Package 3 width	15 cm
Package 3 Length	40 cm

## Offer Sustainability

---

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Not applicable, out of EU RoHS legal scope

---


## Contractual warranty

---

Warranty	18 months
----------	-----------

---

Dimensions

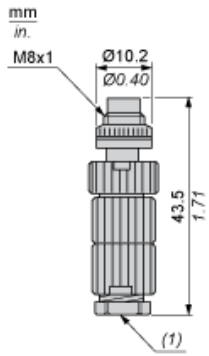

(1) Cable gland : M9.5 x 1

---

Connections and Schemes

---

