


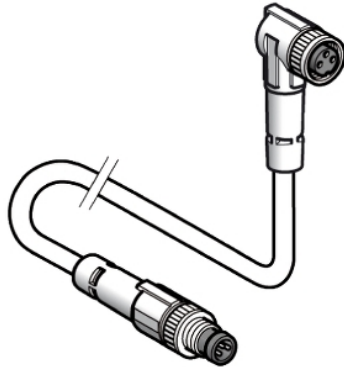

## Main

|                                    |                   |
|------------------------------------|-------------------|
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type     | Jumper cable      |

## Complementary

|                                     |                                                             |
|-------------------------------------|-------------------------------------------------------------|
| Jumper cable end 1                  | M8 male 3 pins straight connector with screw-on and clip-on |
| Jumper cable end 2                  | M8 female 3 pins elbowed connector with screw-on            |
| Collar material                     | Metal                                                       |
| Cable composition                   | 3 x 0.34 mm <sup>2</sup>                                    |
| Cable length                        | 2 m                                                         |
| Wire insulation material            | PUR                                                         |
| Cable outer diameter                | 5.2 mm                                                      |
| [Ue] rated operational voltage      | 45 V DC<br>60 V AC                                          |
| [In] rated current                  | 4 A                                                         |
| Insulation resistance               | >= 1000 MOhm                                                |
| Maximum resistance across terminals | 5000 mOhm                                                   |
| Net weight                          | 0.09 kg                                                     |

## Environment

|                                       |                                          |
|---------------------------------------|------------------------------------------|
| IP degree of protection               | IP69K<br>IP67<br>IP65                    |
| Product certifications                | CULus                                    |
| Ambient air temperature for operation | -35...90 °C static<br>-5...90 °C flexing |
| Ambient air temperature for storage   | -35...100 °C                             |

## Packing Units

|                  |          |
|------------------|----------|
| Package 1 Weight | 0.064 kg |
| Package 1 Height | 0.300 dm |
| Package 1 width  | 2.400 dm |
| Package 1 Length | 2.400 dm |


## Offer Sustainability

|                            |                                                                                                |
|----------------------------|------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                          |
| REACH Regulation           | <a href="#">REACH Declaration</a>                                                              |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a> |
| Mercury free               | Yes                                                                                            |
| RoHS exemption information | <a href="#">Yes</a>                                                                            |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                  |
| Circularity Profile        | <a href="#">End Of Life Information</a>                                                        |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

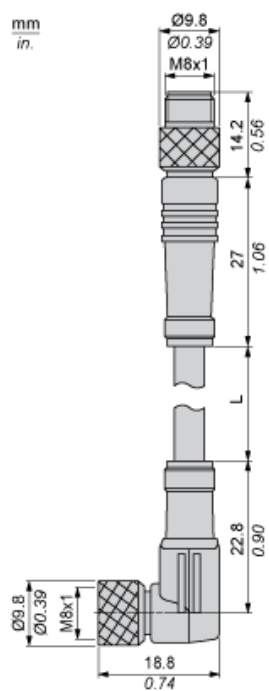

L : Length of cable

---

Connections and Schemes

---

