

# Product data sheet

## Characteristics

# XZCRA151164D2

Jumper cable XZ, male straight M12 5 pin, female straight M12 5 pin, PVC 2 m



### Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Jumper cable

### Complementary

Jumper cable end 1	M12 male 5 pins straight connector with screw-on and clip-on
Jumper cable end 2	M12 female 5 pins straight connector with screw-on and clip-on
Collar material	Metal
Cable composition	5 x 0.34 mm <sup>2</sup>
Cable length	2 m
Cable outer diameter	5.7 mm
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	4 A
Insulation resistance	>= 1000 MOhm
Maximum resistance across terminals	5000 mOhm
Net weight	0.12 kg

### Environment

IP degree of protection	IP69K
Ambient air temperature for operation	-25...85 °C static

### Packing Units

Package 1 Weight	0.267 kg
Package 1 Height	0.300 dm
Package 1 width	1.400 dm
Package 1 Length	1.500 dm


### Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>

### Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

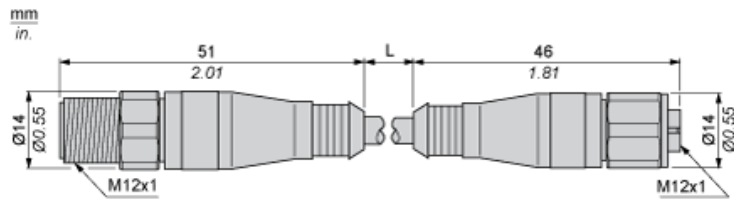

L : Length of cable

---

Connections and Schemes

---

