



## Main

|                                    |                                  |
|------------------------------------|----------------------------------|
| Range of product                   | Telemecanique Cabling components |
| Accessory / separate part category | Cabling accessory                |
| Accessory / separate part type     | Pre-wired connectors             |
| Series name                        | Application                      |

## Complementary

|                                |                                      |
|--------------------------------|--------------------------------------|
| Electrical connection          | Elbowed female connector M12, 4 pins |
| Cable connector fixing         | Screw-on                             |
| Collar material                | Stainless steel 316L                 |
| Status LED                     | Without                              |
| Cable length                   | 2 m                                  |
| Cable outer diameter           | 5.3 mm                               |
| Cable composition              | 4 x 0.34 mm <sup>2</sup>             |
| Wire insulation material       | PVC                                  |
| [Ue] rated operational voltage | 250 V AC<br>300 V DC                 |
| [In] rated current             | 4 A                                  |
| Contact resistance             | 5000 µOhm                            |
| Minimum insulating resistance  | 1 GΩ                                 |
| Net weight                     | 0.09 kg                              |

## Environment

|                                       |                    |
|---------------------------------------|--------------------|
| IP degree of protection               | IP69K              |
| Ambient air temperature for operation | -25...85 °C static |
| Ambient air temperature for storage   | -35...100 °C       |

## Packing Units

|                              |          |
|------------------------------|----------|
| Unit Type of Package 1       | PCE      |
| Number of Units in Package 1 | 1        |
| Package 1 Weight             | 96 g     |
| Package 1 Height             | 3.2 cm   |
| Package 1 width              | 12.3 cm  |
| Package 1 Length             | 14.8 cm  |
| Unit Type of Package 2       | S03      |
| Number of Units in Package 2 | 40       |
| Package 2 Weight             | 4.355 kg |
| Package 2 Height             | 30 cm    |
| Package 2 width              | 30 cm    |
| Package 2 Length             | 40 cm    |


Offer Sustainability

|                            |                                                                                                                                                                                    |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| REACH Regulation           |  <a href="#">REACH Declaration</a>                                                                |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free     | Yes                                                                                                                                                                                |
| Mercury free               | Yes                                                                                                                                                                                |
| RoHS exemption information |  <a href="#">Yes</a>                                                                              |

Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

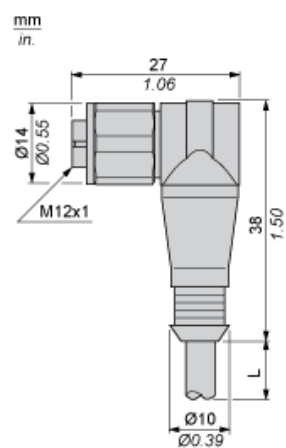


L : Length of cable

---

## Connections and Schemes

---

### Connector



BN : Brown  
BK : Black  
BU : Blue  
WH : White