


Product data sheet

Characteristics

XUZE06

fuse cartridge 5 x 20 - fast blow 0.63 A -
without indication

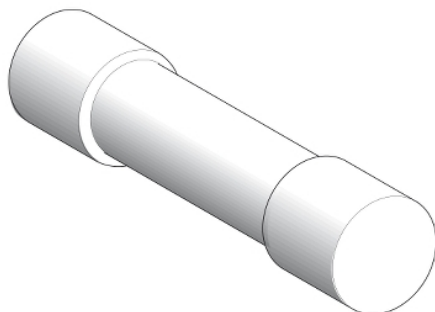

Main

Range of product	Telemecanique Photoelectric sensors XU
Accessory / separate part category	Fuses
Accessory / separate part type	Fast blow fuse
Accessory / separate part designation	Cartridge fuse
Accessory / separate part destination	Unprotected 2-wire AC/DC sensor
Sale per indivisible quantity	10

Complementary

Product compatibility	XS XT
[In] rated current	0.63 A
Fuse size	5 x 20 mm
Fuse curve	Fast blow
Local signalling	Without
Net weight	0.001 kg

Packing Units

Package 1 Weight	0.001 kg
Package 1 Height	0.050 dm
Package 1 width	0.400 dm
Package 1 Length	0.800 dm

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Not applicable, out of EU RoHS legal scope
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information

Contractual warranty

Warranty	18 months
----------	-----------

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.