

# XB5FJ33C0

Selector switch, Harmony XB5, flush mounted  
ssw long handle 3 pos stay put 2 NO screw  
clamp cp grey



## Main

|                               |                                                                                                                                                                            |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range of product              | Harmony XB5                                                                                                                                                                |
| Product or component type     | Selector switch                                                                                                                                                            |
| Device short name             | XB5F                                                                                                                                                                       |
| Bezel material                | Plastic colour plated grey                                                                                                                                                 |
| Head type                     | Built-in-flush                                                                                                                                                             |
| Mounting diameter             | 30.5 mm                                                                                                                                                                    |
| Sale per indivisible quantity | 1                                                                                                                                                                          |
| Shape of signaling unit head  | Round                                                                                                                                                                      |
| Type of operator              | Stay put stay put                                                                                                                                                          |
| Operator profile              | Black long handle, unmarked                                                                                                                                                |
| Operator position information | 3 positions +/- 45°                                                                                                                                                        |
| Contacts type and composition | 2 NO                                                                                                                                                                       |
| Contact operation             | Slow-break                                                                                                                                                                 |
| Connections - terminals       | Screw clamp terminals, <= 2 x 1.5 mm² with cable end conforming to EN/IEC 60947-1<br>Screw clamp terminals, >= 1 x 0.22 mm² without cable end conforming to EN/IEC 60947-1 |

## Complementary

|                                             |                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Height                                      | 42 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Width                                       | 36.6 mm                                                                                                                                                                                                                                                                                                                                                                        |
| Depth                                       | 73 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Terminals description ISO n°1               | (13-14)NO<br>(23-24)NO                                                                                                                                                                                                                                                                                                                                                         |
| Resistance to high pressure washer          | 7000000 Pa at 55 °C, distance : 0.1 m                                                                                                                                                                                                                                                                                                                                          |
| Contacts usage                              | Standard contacts                                                                                                                                                                                                                                                                                                                                                              |
| Positive opening                            | Without                                                                                                                                                                                                                                                                                                                                                                        |
| Mechanical durability                       | 1000000 cycles                                                                                                                                                                                                                                                                                                                                                                 |
| Tightening torque                           | 0.8...1.2 N.m conforming to EN 60947-1                                                                                                                                                                                                                                                                                                                                         |
| Shape of screw head                         | Cross compatible with Philips no 1 screwdriver<br>Cross compatible with pozidriv No 1 screwdriver<br>Slotted compatible with flat Ø 4 mm screwdriver<br>Slotted compatible with flat Ø 5.5 mm screwdriver                                                                                                                                                                      |
| Contacts material                           | Silver alloy (Ag/Ni)                                                                                                                                                                                                                                                                                                                                                           |
| Short-circuit protection                    | 10 A cartridge fuse type gG conforming to EN/IEC 60947-5-1                                                                                                                                                                                                                                                                                                                     |
| [Ith] conventional free air thermal current | 10 A conforming to EN/IEC 60947-5-1                                                                                                                                                                                                                                                                                                                                            |
| [Ui] rated insulation voltage               | 600 V (pollution degree 3) conforming to EN 60947-1                                                                                                                                                                                                                                                                                                                            |
| [Uimp] rated impulse withstand voltage      | EN 60947-1 6 kV                                                                                                                                                                                                                                                                                                                                                                |
| [Ie] rated operational current              | 3 A at 240 V, AC-15, A600 conforming to EN/IEC 60947-5-1<br>6 A at 120 V, AC-15, A600 conforming to EN/IEC 60947-5-1<br>0.1 A at 600 V, DC-13, Q600 conforming to EN/IEC 60947-5-1<br>0.27 A at 250 V, DC-13, Q600 conforming to EN/IEC 60947-5-1<br>0.55 A at 125 V, DC-13, Q600 conforming to EN/IEC 60947-5-1<br>1.2 A at 600 V, AC-15, A600 conforming to EN/IEC 60947-5-1 |

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Electrical durability  | 1000000 Cycles, AC-15, 2 A at 230 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C<br>1000000 Cycles, AC-15, 3 A at 120 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C<br>1000000 Cycles, AC-15, 4 A at 24 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C<br>1000000 Cycles, DC-13, 0.2 A at 110 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C<br>1000000 cycles, DC-13, 0.5 A at 24 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C |
| Electrical reliability | $\Lambda < 10\exp(-6)$ at 5 V, 1 mA in clean environment conforming to EN/IEC 60947-5-4<br>$\Lambda < 10\exp(-8)$ at 17 V, 5 mA in clean environment conforming to EN/IEC 60947-5-4                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Device presentation    | Complete product                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

## Environment

|                                       |                                                                                                                                                                                |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Protective treatment                  | TH                                                                                                                                                                             |
| Ambient air temperature for storage   | -40...70 °C                                                                                                                                                                    |
| Ambient air temperature for operation | -40...70 °C                                                                                                                                                                    |
| Electrical shock protection class     | Class II conforming to IEC 60536                                                                                                                                               |
| IP degree of protection               | IP66 conforming to IEC 60529<br>IP67                                                                                                                                           |
| NEMA degree of protection             | NEMA 13<br>NEMA 4X                                                                                                                                                             |
| IK degree of protection               | IK03 conforming to IEC 50102                                                                                                                                                   |
| Standards                             | EN/IEC 60947-1<br>UL 508<br>JIS C8201-5-1<br>EN/IEC 60947-5-4<br>EN/IEC 60947-5-1<br>CSA C22.2 No 14<br>JIS C8201-1                                                            |
| Product certifications                | UL listed<br>CSA                                                                                                                                                               |
| Vibration resistance                  | 5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6                                                                                                                               |
| Shock resistance                      | 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27<br>50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27 |


## Packing Units

|                  |          |
|------------------|----------|
| Package 1 Weight | 61.000 g |
| Package 1 Height | 8.600 cm |
| Package 1 width  | 4.300 cm |
| Package 1 Length | 5.200 cm |

## Offer Sustainability

|                            |                                                                                                                                                                                      |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| REACH Regulation           |  <a href="#">REACH Declaration</a>                                                                |
| REACH free of SVHC         | Yes                                                                                                                                                                                  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free     | Yes                                                                                                                                                                                  |
| Mercury free               | Yes                                                                                                                                                                                  |
| RoHS exemption information |  <a href="#">Yes</a>                                                                              |
| China RoHS Regulation      |  <a href="#">China RoHS Declaration</a>                                                           |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins                                                          |


## Dimensions

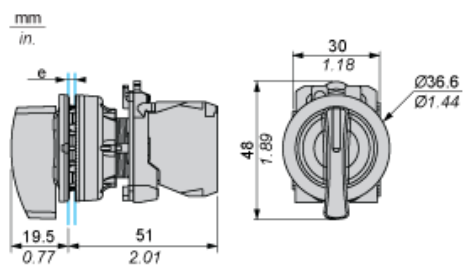

e: Clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors



- (1) Diameter on finished panel or support
- (2) Ø30.75 mm recommended ( $\text{Ø}30.5 \begin{smallmatrix} +0.5 \\ 0 \end{smallmatrix}$ ) / Ø1.21 in. recommended ( $\text{Ø}1.20 \text{ in. } \begin{smallmatrix} +0.0196 \\ 0 \end{smallmatrix}$ )

| Connections                                   | a in mm | a in in. | b in mm | b in in. |
|-----------------------------------------------|---------|----------|---------|----------|
| By screw clamp terminals or plug-in connector | 40      | 1.57     | 40      | 1.57     |
| By Faston connectors                          | 45      | 1.77     | 40      | 1.57     |

---

Electrical Composition Corresponding to Code C3

---



---

Electrical Composition Corresponding to Code C4


---



---

Electrical Composition Corresponding to Code C5


---



---

Electrical Composition Corresponding to Code C6


---



---

Electrical Composition Corresponding to Code C7

---



## Electrical Composition Corresponding to Code C8

---



## Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1

---



## Electrical Composition Corresponding to Code C15

---

1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



## Legend

---

Single contact



Double contact



Light block



Possible location



## Sequence of Contacts Fitted to 2-position Selector Switch Body

### Position 315°



|          |                                                                                   |                                                                                   |                                                                                   |        |      |
|----------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------|------|
| Push     | Position                                                                          | Top                                                                               |                                                                                   |        |      |
| Bottom   |  |  |  |        |      |
| Location |                                                                                   | Left                                                                              | Centre                                                                            | Right  |      |
| State    |                                                                                   | 0                                                                                 | 0                                                                                 | 0      |      |
| Contacts | N/O                                                                               |                                                                                   | open                                                                              | open   | open |
| N/C      |                                                                                   | closed                                                                            | closed                                                                            | closed |      |

### Position 45°



|          |             |      |        |        |        |
|----------|-------------|------|--------|--------|--------|
| Push     | Position    | Top  |        |        |        |
| Bottom   | <div></div> |      |        |        |        |
| Location |             | Left | Centre | Right  |        |
| State    |             | 1    | 1      | 1      |        |
| Contacts | N/O         |      | closed | closed | closed |
| N/C      |             | open | open   | open   |        |