

# XVR12B03

Prewired rotating mirror beacon, Harmony  
XVR, 120 mm, green, without buzzer, 24 V AC  
DC



## Main

Range of product	Harmony XVR
Product or component type	Prewired rotating mirror beacon
Sound signalling	Without
Device short name	XVR
Mounting diameter	120 mm
IP degree of protection	IP23 conforming to IEC 60529
[Us] rated supply voltage	24 V AC/DC
Light source	High luminosity LED, green

## Complementary

Material	ABS (acrylonitrile butadiene-styrene): body part AS: globe
CAD overall width	120 mm
CAD overall depth	120 mm
Net weight	0.5 kg
Marking	CE
Product mounting	By 3 M5 screws
Supply voltage limits	19...30 V DC 21.6...26.4 V AC
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	125 mA
Flashing frequency	2.3 Hz
Clamping connection capacity	0.83 mm <sup>2</sup>
AWG gauge	AWG 18
Cable length	400 mm







## Environment

Standards	EN 61000-6-4 EN 61000-6-2
Protective treatment	TC
Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	-10...50 °C
Electrical shock protection class	Class II conforming to IEC 61140

## Packing Units

Package 1 Weight	0.586 kg
Package 1 Height	1.950 dm
Package 1 width	1.380 dm
Package 1 Length	1.400 dm

## Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	<a href="#"> REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#"> EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#"> Yes</a>
China RoHS Regulation	<a href="#"> China RoHS Declaration</a>
Environmental Disclosure	<a href="#"> Product Environmental Profile</a>
Circularity Profile	<a href="#"> End Of Life Information</a>

## Contractual warranty

Warranty	18 months
----------	-----------

## Rotating Mirror Beacon

### Dimensions

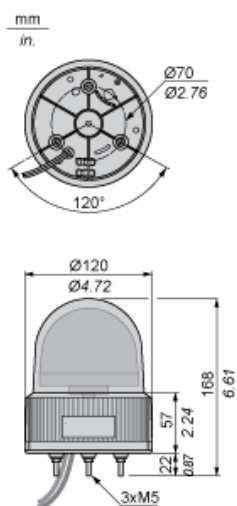

---

Rotating Mirror Beacon

---

Panel Cut-out

