


Product data sheet

Characteristics

ZB4BZ1055

Harmony XB4, Single contact block with body/fixing collar, metal, spring clamp terminal, 1 NO + 2 NC

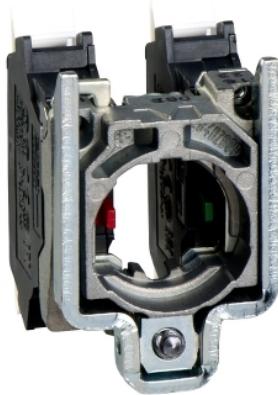

Main

Range of product	Harmony XB4
Product or component type	Complete body/contact assembly
Device short name	ZB4
Fixing collar material	Zamak
Sale per indivisible quantity	1
Head type	Standard
Contacts type and composition	1 NO + 2 NC
Contact operation	Slow-break
Contact block type	Single
Device composition	Fixing collar Contact block

Complementary

CAD overall width	30 mm
Net weight	0.064 kg
Mechanical durability	10000000 cycles
Contacts material	Silver alloy (Ag/Ni)
[Ie] rated operational current	10 A, Q600 10 A, A600
Electrical durability	10000000 cycles, 10 A
Device presentation	Basic sub-assemblies

Environment

Protective treatment	TH
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-40...70 °C
IP degree of protection	IP20 conforming to IEC 60529

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	60 g
Package 1 Height	4.7 cm
Package 1 width	5.3 cm
Package 1 Length	3.6 cm
Unit Type of Package 2	BB1
Number of Units in Package 2	5
Package 2 Weight	305 g
Package 2 Height	3.5 cm
Package 2 width	4.2 cm
Package 2 Length	26.5 cm
Unit Type of Package 3	S03
Number of Units in Package 3	200

Package 3 Weight	12.781 kg
Package 3 Height	30 cm
Package 3 width	30 cm
Package 3 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins