

Product data sheet

Characteristics

XAPM14H29

empty control station - XAP-M - zinc alloy - without opening



Main

| | |
|-----------------------------|---|
| Range of product | Harmony XAP |
| Product or component type | Die-cast empty control station |
| Device short name | XAPM |
| Product front plate size | 80 x 80 mm |
| Usable depth | 74.5 mm |
| Number of cut-out | Undrilled |
| Colour of base of enclosure | Blue |
| Colour of cover | Blue |
| Material | Zinc alloy |
| Cable entry | 1 hole with blanking plug for ISO 429248 cable gland, clamping capacity: 20 mm 1 hole without blanking plug for ISO 429248 cable gland, clamping capacity: 20 mm |
| Product mounting | Flush mounting |
| IP degree of protection | IP65 conforming to IEC 60529 IP69 conforming to NF C 20-010 IP69K |

Complementary

| | |
|------------|---------|
| Net weight | 0.61 kg |
|------------|---------|

Environment

| | |
|---------------------------------------|--|
| Protective treatment | TC |
| Ambient air temperature for storage | -40...70 °C |
| Ambient air temperature for operation | -40...70 °C |
| Electrical shock protection class | Class I conforming to IEC 60536 Class I conforming to NF C 20-030 |

Packing Units

| | |
|------------------------------|----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Weight | 734 g |
| Package 1 Height | 8.5 cm |
| Package 1 width | 9 cm |
| Package 1 Length | 9.2 cm |
| Unit Type of Package 2 | S02 |
| Number of Units in Package 2 | 12 |
| Package 2 Weight | 9.464 kg |
| Package 2 Height | 15 cm |
| Package 2 width | 30 cm |
| Package 2 Length | 40 cm |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


Offer Sustainability

| | |
|----------------------------|--|
| Sustainable offer status | Green Premium product |
| REACH Regulation | <input checked="" type="checkbox"/> REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) <input checked="" type="checkbox"/> EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | <input checked="" type="checkbox"/> Yes |
| China RoHS Regulation | <input checked="" type="checkbox"/> China RoHS Declaration |
| Environmental Disclosure | <input checked="" type="checkbox"/> Product Environmental Profile |
| Circularity Profile | <input checked="" type="checkbox"/> End Of Life Information |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions and Fixing

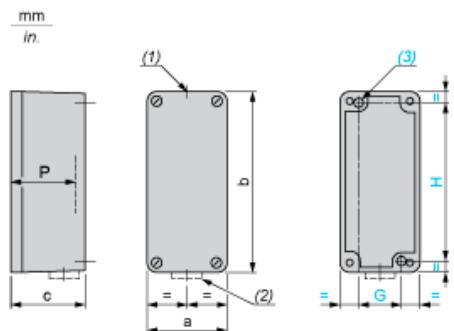

(1) 1 hole, without blanking plug, for cable gland with 14 mm/0.55 in. maximum clamping capacity
 (2) 1 hole, with blanking plug (protrusion 6 mm/0.24 in.), for cable gland with 14 mm/0.55 in. maximum clamping capacity
 (3) 2 x Ø 5.6 mm/0.22 in. holes, depth 20 mm/0.79 in.

| a | | b | | c | | G | | H | | P | |
|----|------|----|------|----|------|----|------|----|------|------|------|
| mm | in. | mm | in. |
| 80 | 3.15 | 80 | 3.15 | 77 | 3.03 | 50 | 1.97 | 65 | 2.56 | 74.5 | 2.93 |