

# XAPM34H29

Harmony XAP, XB2 SL, Empty control station, zinc alloy, blue, undrilled, with ISO cable entries, 80 x 175 x 77 mm



## Main

|                             |                                                                                                                                                                     |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range of product            | Harmony XAP                                                                                                                                                         |
| Product or component type   | Die-cast empty control station                                                                                                                                      |
| Device short name           | XAPM                                                                                                                                                                |
| Product front plate size    | 80 x 175 mm                                                                                                                                                         |
| Usable depth                | 74.5 mm                                                                                                                                                             |
| Number of cut-out           | Undrilled                                                                                                                                                           |
| Colour of base of enclosure | Blue                                                                                                                                                                |
| Colour of cover             | Blue                                                                                                                                                                |
| Material                    | Zinc alloy                                                                                                                                                          |
| Cable entry                 | 1 hole with blanking plug for ISO 429248 cable gland, clamping capacity: 25 mm<br>1 hole without blanking plug for ISO 429248 cable gland, clamping capacity: 25 mm |
| Product mounting            | Flush mounting                                                                                                                                                      |
| IP degree of protection     | IP65 conforming to IEC 60529<br>IP69 conforming to NF C 20-010<br>IP69K                                                                                             |

## Complementary

|            |         |
|------------|---------|
| Net weight | 1.16 kg |
|------------|---------|

## Environment

|                                       |                                                                      |
|---------------------------------------|----------------------------------------------------------------------|
| Protective treatment                  | TC                                                                   |
| Ambient air temperature for storage   | -40...70 °C                                                          |
| Ambient air temperature for operation | -40...70 °C                                                          |
| Electrical shock protection class     | Class I conforming to IEC 60536<br>Class I conforming to NF C 20-030 |

## Packing Units

|                  |          |
|------------------|----------|
| Package 1 Weight | 1.160 kg |
| Package 1 Height | 0.820 dm |
| Package 1 width  | 1.170 dm |
| Package 1 Length | 1.840 dm |

## Offer Sustainability

|                            |                                                                                 |
|----------------------------|---------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                           |
| REACH Regulation           | REACH Declaration                                                               |
| REACH free of SVHC         | Yes                                                                             |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration |
| Toxic heavy metal free     | Yes                                                                             |
| Mercury free               | Yes                                                                             |
| RoHS exemption information | Yes                                                                             |

---

|                          |                                               |
|--------------------------|-----------------------------------------------|
| China RoHS Regulation    | <a href="#">China RoHS Declaration</a>        |
| Environmental Disclosure | <a href="#">Product Environmental Profile</a> |
| Circularity Profile      | <a href="#">End Of Life Information</a>       |

---


### Contractual warranty

---

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

---

Dimensions and Fixing

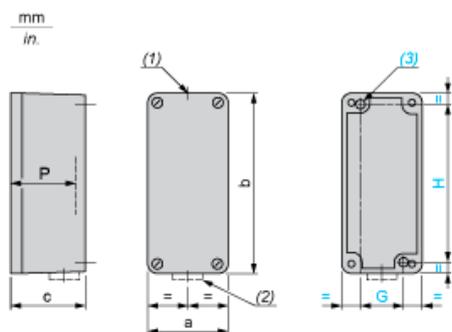

- (1) 1 hole, without blanking plug, for cable gland with 18 mm/0.71 in. maximum clamping capacity
- (2) 1 hole, with blanking plug (protrusion 6 mm/0.24 in.), for cable gland with 18 mm/0.71 in. maximum clamping capacity
- (3) 2 x Ø 5.6 mm/0.22 in. holes, depth 20 mm/0.79 in.

| a  |      | b   |      | c  |      | G  |      | H   |      | P    |      |
|----|------|-----|------|----|------|----|------|-----|------|------|------|
| mm | in.  | mm  | in.  | mm | in.  | mm | in.  | mm  | in.  | mm   | in.  |
| 80 | 3.15 | 175 | 6.89 | 77 | 3.03 | 50 | 1.97 | 160 | 6.30 | 74.5 | 2.93 |