



### Main

Range of product	Telemecanique Safety light curtains XUSL
Accessory / separate part category	Protection accessories
Accessory / separate part type	Protective screen
Product compatibility	XUSL.E...76
Accessory / separate part destination	Safety light curtain type 4 Safety light curtain type 2
Height	795 mm
Quantity per set	Set of 4

### Complementary

Material	Polycarbonate
Sensing distance reduction coefficient	0.97 Sn
Net weight	0.31 kg

### Environment

Resistance to chemical agents	Resistant aqueous solutions Resistant to inorganic diluted acids Resistant alkalis Resistant detergents and cleaners
Ambient air temperature for operation	-10...55 °C -10...55 °C
Ambient air temperature for storage	-25...70 °C -25...70 °C

### Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	1.368 kg
Package 1 Height	14.5 cm
Package 1 width	20 cm
Package 1 Length	92 cm

### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>

Mounting and Clearance

Various Stages in the Protective Screen Assembly

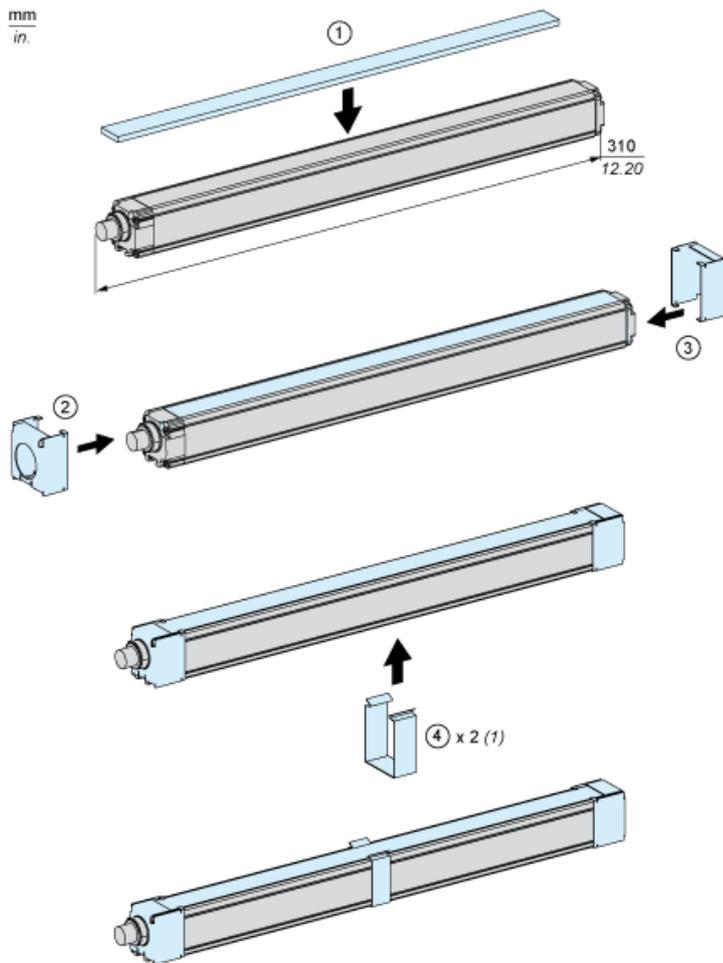

(1) Depending on the length