



## Main

Range of product	Telemecanique Safety light curtains XUSL
Product or component type	Safety thru-beam pair photo-electric sensors
Device short name	XU2S
Output type	1 safety outputs OSSD PNP
[Sn] nominal sensing distance	8 m

## Complementary

Detection system	Transmitter-receiver system
[Us] rated supply voltage	12...24 V DC 10...30 V reverse polarity protection
Current consumption	<= 35 mA no-load
Maximum voltage drop	<1.5 V (closed)
Switching capacity in mA	<= 100 mA (overload and short-circuit protection)
Switching frequency	500 Hz maximum
Electrical connection	Pre-cabled
Line of sight type	Along case axis
Maximum delay response	1 ms
Maximum delay recovery	1 ms
Cable outer diameter	5 mm
Cable length	5 m
Cable composition	3 x 0.34 mm <sup>2</sup> for transmitter 4 x 0.34 mm <sup>2</sup> for receiver
Tightening torque	24 N.m fixing nut
Function available	Built-in muting function Light or dark programmable switching
Marking	CE
Material	Nickel plated brass: case PMMA (polymethyl methacrylate): lenses
Net weight	0.485 kg

## Environment

Standards	EN/IEC 60825-1 EN/IEC 61496-2 EN/IEC 61496-1
Safety level	Can reach PL = c associated with module XPSCM correctly wired conforming to EN/ISO 13849-1 Can reach category 2 associated with module XPSCM correctly wired conforming to EN/ISO 13849-1 Type 2 conforming to IEC 61496-1-2
Ambient air temperature for operation	-25...55 °C
Safety reliability data	PFH = 5.5E-7 1/h conforming to IEC 61508 with muting function PFH = 4.6E-7 1/h conforming to IEC 61508
Ambient air temperature for storage	-40...70 °C

IP degree of protection	IP67 conforming to EN/IEC 60529
Shock resistance	30 gn 3 axes : 3 times conforming to EN/IEC 60068-2-27
Vibration resistance	7 gn (f= 10...55 Hz) conforming to EN/IEC 60068-2-6

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	432 g
Package 1 Height	6.7 cm
Package 1 width	9.5 cm
Package 1 Length	13.2 cm
Unit Type of Package 2	S03
Number of Units in Package 2	22
Package 2 Weight	10.01 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

### Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>

### Contractual warranty

Warranty	18 months
----------	-----------


Dimensions

Receiver

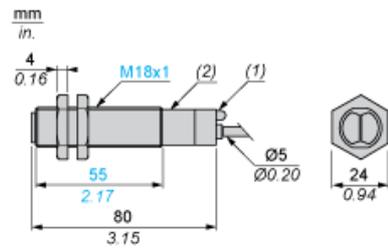

- (1) LED
- (2) Potentiometer


Transmitter

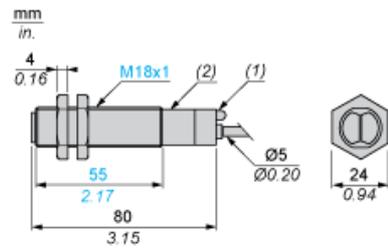

- (1) LED
- (2) Potentiometer

## Wiring Schemes (3-wire DC)


### Transmitter



BU : Blue  
BN : Brown  
VI : Violet  
(1) Test


### Beam Break Test

Beam Made



BU : Blue  
BN : Brown  
VI : Violet


Beam Broken



BU : Blue  
BN : Brown  
VI : Violet


### Receiver

Light switching (no object present). PNP output



BN : Brown  
BU : Blue  
BK : Black  
OG : Orange

Dark switching (no object present). PNP output



BN : Brown  
BU : Blue  
BK : Black  
OG : Orange

## Connecting to a Safety Module

**Discover**  
**XU2S18PP340D by**

- Characteristics
- Dimensions Drawings
- Connections and Schema
- Performance Curves
- **Download & Documents**

①

**Download & Documents 1 to 8 of 8**

**CAD**

Preventa - Photo-electric sensors - Thru beam, pair - Ref. XU2S18PP340D	SILENT 2015-07-21	(Se ▼)
Preventa - Photo-electric sensors - Thru beam, pair - Ref. XU2S18PP340D	SILENT 2009-10-23	(Se ▼)

**Instruction sheet**

XU2S18... Cylindrical photo-electric sensor design 18	English 2015-07-21	pdf ▼
---	--------------------	-------

**Product environmental**

XUB... XU1... to XU9... Photoelectric Sensor, Product Environmental profile	English 2012-03-19	pdf ▼
---	--------------------	-------

**End of life manual**

XUB... and XU1... to XU9... Photoelectric Sensors, Product End-of-life Instructions	English 2012-02-20	pdf ▼
---	--------------------	-------

**System user guide**

Connecting to a monitoring device XU2S	English 2015-06-08	pdf ▼
--	--------------------	-------

**Catalog**

Safety light curtains Preventa XUSL	English 2015-05-18	pdf ▼
-------------------------------------	--------------------	-------

**Image of product**

Security light curtain XU2S	SILENT 2015-07-21	(Se ▼)
-----------------------------	-------------------	--------


②

- 1 : Click on Download & Documents
- 2 : Click on System user guide

To have all connection schematics concerning our safety module, select "download and document" and download the file "Connecting to a monitoring device XU2S"


Curves

Infrared Detection Curve



(1) Ø of beam

Verification of Correct Operation



- (1) LED off
- (2) LED on
- (3) Red LED
- (4) Signal level
- (5) Optimum alignment