


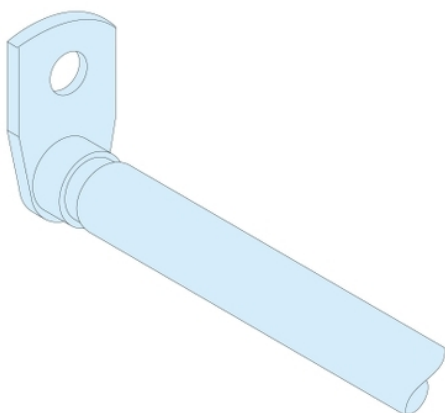

Main

Range	Lineryg
Range of product	Lineryg
Product or component type	Flexible connection
Product name	Lineryg FM
Product name	Prisma G enclosure Prisma P enclosure Lineryg FM device feeder
Standards	IEC 61439-1, inside Prisma IEC 61439-2, inside Prisma
Product certifications	ASEFA

Complementary

Cubicle-device connection	Lineryg FM distribution block Lineryg BW busbar
Poles description	4P
Installation description	Enclosure - width $\geq$ 600 mm
Installed device	Lineryg FM 200 A
[Ie] rated operational current	200 A
[In] rated current	200 A
Colour	Anthracite grey (RAL 7016)
Length	400 mm
Net weight	0.78 kg
Quantity per set	Set of 4

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	750 g
Package 1 Height	2 cm
Package 1 width	12.5 cm
Package 1 Length	39 cm
Unit Type of Package 2	S02
Number of Units in Package 2	25
Package 2 Weight	18.75 kg
Package 2 Height	15 cm
Package 2 width	30 cm
Package 2 Length	40 cm
Unit Type of Package 3	P12
Number of Units in Package 3	200
Package 3 Weight	159.2 kg
Package 3 Height	80 cm
Package 3 width	80 cm
Package 3 Length	120 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Halogen content performance	Halogen free plastic parts product