


Product data sheet

Characteristics

04024

4P CONN.LIN.BS STAGE BB/LIN.FM
D.BLK200A

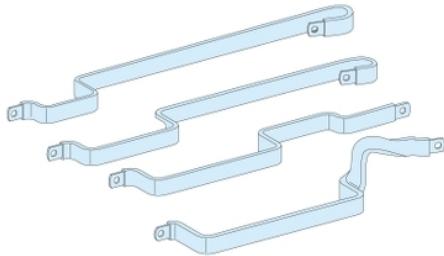

Main

Range	Linergy
Range of product	Linergy
Product or component type	Connection
Product name	Linergy FM
Product name	Prisma G enclosure Prisma P enclosure Linergy FM device feeder
Standards	IEC 61439-1, inside Prisma IEC 61439-2, inside Prisma
Product certifications	ASEFA

Complementary

Cubicle-device connection	Linergy FM distribution block Linergy BS busbar
Poles description	4P
Installation description	Cubicle duct - width 300 mm Floor-standing duct - width 300 mm Wall-mounted duct - width 300 mm
[Ie] rated operational current	200 A
[In] rated current	200 A
Colour	Anthracite grey (RAL 7016)
Net weight	2.02 kg
Quantity per set	Set of 1

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	2.02 kg
Package 1 Height	10.5 cm
Package 1 width	11.5 cm
Package 1 Length	57 cm
Unit Type of Package 2	P12
Number of Units in Package 2	36
Package 2 Weight	72.72 kg
Package 2 Height	80 cm
Package 2 width	80 cm
Package 2 Length	120 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <input checked="" type="checkbox"/> EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes

RoHS exemption information	<input checked="" type="checkbox"/> Yes
China RoHS Regulation	<input checked="" type="checkbox"/> China RoHS Declaration
Environmental Disclosure	<input checked="" type="checkbox"/> Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
