


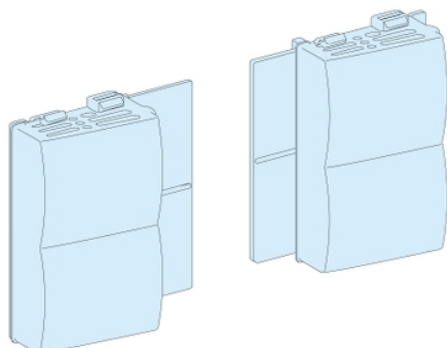

Main

Range	Linergy
Range of product	Linergy
Product or component type	Universal power supply block
Product name	Linergy BW
Product name	Prisma P enclosure Prisma G enclosure Linergy BW busbar
Accessory / separate part category	Current distribution accessory
Provided equipment	Without cable
Standards	IEC 61439-1, inside Prisma IEC 61439-2, inside Prisma
Product certifications	ASEFA

Complementary

Cubicle-device connection	Linergy BW busbar
Poles description	4P
Installation description	Floor-standing duct - width 300 mm Wall-mounted duct - width 300 mm Cubicle - width 650 mm Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Floor-standing enclosure - width 850 mm Floor-standing enclosure + duct - width 600 + 300 mm Wall-mounted enclosure + duct - width 600 + 300 mm
Installed device	ComPact: fixed INS250 - control: direct front rotary handle vertical installation ComPact: fixed INV250 - control: direct front rotary handle vertical installation FuPact: fixed ISFT160 - control: fuse carriers handle vertical installation EasyPact: fixed CVS100...160 without earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS250 without earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS100...160 without earth leakage protection - control: direct front rotary handle vertical installation EasyPact: fixed CVS250 without earth leakage protection - control: direct front rotary handle vertical installation EasyPact: fixed CVS100...160 without earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS250 without earth leakage protection - control: toggle vertical installation ComPact: fixed INV100 - control: direct front rotary handle vertical installation FuPact: fixed ISFT100N - control: fuse carriers handle vertical installation ComPact: fixed NSX100...160 without earth leakage protection - control: toggle vertical installation ComPact: fixed NSX250 without earth leakage protection - control: toggle vertical installation ComPact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle vertical installation ComPact: fixed NSX250 without earth leakage protection - control: direct front rotary handle vertical installation EasyPact: fixed CVS100...160 with earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS250 with earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS100...160 with earth leakage protection - control: direct front rotary handle vertical installation EasyPact: fixed CVS250 with earth leakage protection - control: direct front rotary handle vertical installation EasyPact: fixed CVS100...160 with earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS250 with earth leakage protection - control: toggle vertical installation ComPact: fixed NSX100...160 with earth leakage protection - control: toggle vertical installation ComPact: fixed NSX250 with earth leakage protection - control: toggle vertical installation ComPact: fixed NSX100...160 with earth leakage protection - control: direct front rotary handle vertical installation ComPact: fixed NSX250 with earth leakage protection - control: direct front rotary handle vertical installation ComPact: fixed INV200 - control: direct front rotary handle vertical installation FuPact: fixed INF100...160 - control: extended rotary handle horizontal installation FuPact: fixed ISFT160 - control: fuse carriers handle horizontal installation FuPact: fixed ISFT250 - control: fuse carriers handle horizontal installation FuPact: fixed ISFT250 - control: fuse carriers handle vertical installation ComPact: fixed INV160 - control: direct front rotary handle vertical installation
[I _e] rated operational current	250 A
[I _n] rated current	250 A
Net weight	0.44 kg

Quantity per set	Set of 1
------------------	----------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	430.5 g
Package 1 Height	4.6 cm
Package 1 width	11.3 cm
Package 1 Length	18.5 cm
Unit Type of Package 2	S04
Number of Units in Package 2	40
Package 2 Weight	18.46 kg
Package 2 Height	30 cm
Package 2 width	40 cm
Package 2 Length	60 cm
Unit Type of Package 3	P12
Number of Units in Package 3	160
Package 3 Weight	73.84 kg
Package 3 Height	80 cm
Package 3 width	80 cm
Package 3 Length	120 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile