


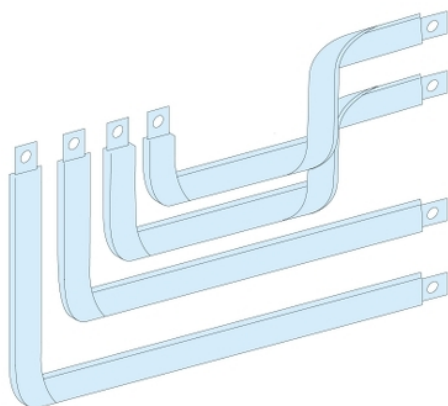

Main

Range	Linery
Range of product	Linery
Product or component type	Connection
Product name	Linery BW
Product name	Prisma P enclosure Prisma G enclosure Linery BW busbar
Accessory / separate part category	Current distribution accessory
Standards	IEC 61439-1, inside Prisma IEC 61439-2, inside Prisma
Product certifications	ASEFA

Complementary

Cubicle-device connection	Universal power supply block
Poles description	4P
Installation description	Cubicle duct - width 300 mm Floor-standing duct - width 300 mm Wall-mounted duct - width 300 mm
Installed device	ComPact: fixed NSX400 without earth leakage protection - control: toggle vertical installation ComPact: fixed NSX400 without earth leakage protection - control: direct front rotary handle vertical installation ComPact: fixed NSX400 with earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS400 without earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS630 without earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS400 without earth leakage protection - control: direct front rotary handle vertical installation EasyPact: fixed CVS630 without earth leakage protection - control: direct front rotary handle vertical installation EasyPact: fixed CVS400 with earth leakage protection - control: toggle vertical installation EasyPact: fixed CVS630 with earth leakage protection - control: toggle vertical installation ComPact: fixed NSX630 without earth leakage protection - control: toggle vertical installation ComPact: fixed NSX630 without earth leakage protection - control: direct front rotary handle vertical installation ComPact: fixed NSX630 with earth leakage protection - control: toggle vertical installation ComPact: fixed INS320...400 - control: direct front rotary handle vertical installation ComPact: fixed INS500...630 - control: direct front rotary handle vertical installation ComPact: fixed INV320...400 - control: direct front rotary handle vertical installation ComPact: fixed INV500...630 - control: direct front rotary handle vertical installation
[Ie] rated operational current	630 A
[In] rated current	630 A
Colour	Anthracite grey (RAL 7016)
Net weight	5.1 kg

Quantity per set	Set of 4
------------------	----------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	4.9 kg
Package 1 Height	15 cm
Package 1 width	30 cm
Package 1 Length	40 cm
Unit Type of Package 2	P12
Number of Units in Package 2	32
Package 2 Weight	163.2 kg
Package 2 Height	80 cm
Package 2 width	80 cm
Package 2 Length	120 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Halogen content performance	Halogen free plastic parts product