


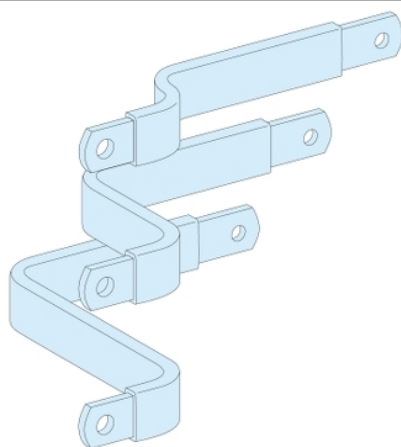

Main

Range	Prisma
Range of product	Prisma P
Product or component type	Connection
Product name	Prisma P enclosure
Accessory / separate part category	Connection accessory
Standards	IEC 61439-2 IEC 61439-1
Product certifications	ASEFA

Complementary

Cubicle-device connection	Linergy busbar
Poles description	3P
Installation description	Cubicle - width 650 mm
Installed device	ComPact: fixed NSX100...160 with earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX100...160 without earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: toggle horizontal installation
[Ie] rated operational current	250 A
[In] rated current	250 A
Net weight	1.02 kg
Quantity per set	Set of 1
Functional unit	650 mm 400 mm Prisma P cubicle ComPact NSX100...160 without fixed toggle horizontal 3P 1 direct 3 650 mm 400 mm Prisma P cubicle ComPact NSX250 without fixed toggle horizontal 3P 1 direct 3 650 mm 400 mm Prisma P cubicle ComPact NSX100...160 with fixed toggle horizontal 3P 1 direct 3 650 mm 400 mm Prisma P cubicle ComPact NSX250 with fixed toggle horizontal 3P 1 direct 3

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	984 g
Package 1 Height	4.3 cm
Package 1 width	27.5 cm
Package 1 Length	30 cm
Unit Type of Package 2	P12
Number of Units in Package 2	60
Package 2 Weight	61.2 kg
Package 2 Height	80 cm
Package 2 width	80 cm
Package 2 Length	120 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information