


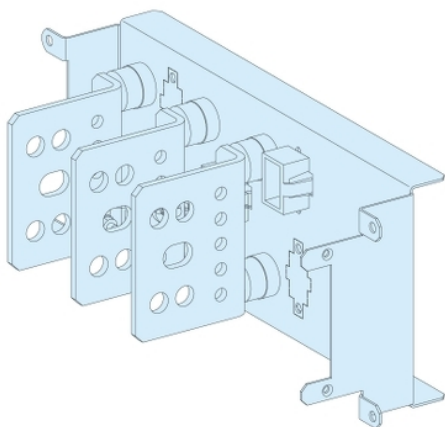

Main

Range	Prisma
Range of product	Prisma P
Product or component type	Connection transfer assembly
Product name	Prisma P enclosure
Accessory / separate part category	Current distribution accessory
Standards	IEC 61439-2 IEC 61439-1
Product certifications	ASEFA

Complementary

Cubicle-device connection	Connection transfer assembly
Poles description	3P
Installation description	Cubicle - width 650 mm
Installed device	ComPact: fixed NSX100...160 with earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS100...160 without earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS250 without earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX100...160 without earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX250 without earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS100...160 with earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS250 with earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX100...160 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS100...160 without earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS250 without earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS100...160 with earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS250 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX100...160 without earth leakage protection - control: motor mechanism horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX100...160 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX250 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX100...160 without earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX250 without earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX100...160 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX250 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX100...160 without earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX250 without earth leakage protection - control: motor mechanism horizontal installation ComPact: fixed NSX100...160 with earth leakage protection - control: motor mechanism horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX100...160 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX250 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX100...160 with earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX250 with earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX100...160 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX250 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX100...160 with earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX250 with earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX100...160 without earth leakage protection - control: toggle horizontal installation ComPact: drawout NSX250 without earth leakage protection - control: toggle horizontal installation ComPact: drawout NSX100...160 with earth leakage protection - control: toggle horizontal installation

[I _e] rated operational current	250 A
[I _n] rated current	250 A
Busbar cross section	20 x 3 mm
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Smooth Matt
Height	150 mm
Width	350 mm
Net weight	2.84 kg

Quantity per set	Set of 1
------------------	----------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	2.84 kg
Package 1 Height	16 cm
Package 1 width	27.5 cm
Package 1 Length	40 cm
Unit Type of Package 2	P12
Number of Units in Package 2	45
Package 2 Weight	127.8 kg
Package 2 Height	80 cm
Package 2 width	80 cm
Package 2 Length	120 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information