


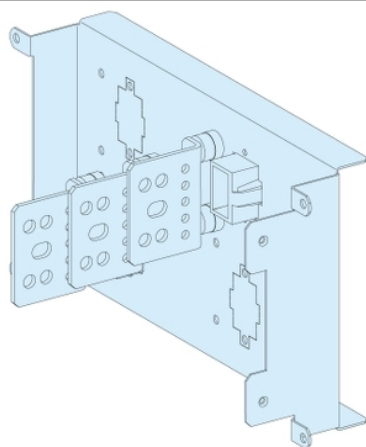

Main

Range	Prisma
Range of product	Prisma P
Product or component type	Connection transfer assembly
Product name	Prisma P enclosure
Accessory / separate part category	Current distribution accessory
Standards	IEC 61439-2 IEC 61439-1
Product certifications	ASEFA

Complementary

Cubicle-device connection	Connection transfer assembly
Poles description	3P
Installation description	Cubicle - width 650 mm
Installed device	EasyPact: fixed CVS400 without earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS630 without earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX400 with earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX630 with earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX400 without earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX630 without earth leakage protection - control: toggle horizontal installation ComPact: drawout NSX400 without earth leakage protection - control: toggle horizontal installation ComPact: drawout NSX630 without earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX400 with earth leakage protection - control: toggle horizontal installation ComPact: plug-in NSX630 with earth leakage protection - control: toggle horizontal installation ComPact: drawout NSX400 with earth leakage protection - control: toggle horizontal installation ComPact: drawout NSX630 with earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS400 without earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS630 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX400 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX400 without earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX400 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX400 without earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX400 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX400 without earth leakage protection - control: motor mechanism horizontal installation ComPact: fixed NSX630 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX630 without earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX630 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX630 without earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX630 without earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX630 without earth leakage protection - control: motor mechanism horizontal installation EasyPact: fixed CVS400 with earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS400 with earth leakage protection - control: direct front rotary handle horizontal installation EasyPact: fixed CVS630 with earth leakage protection - control: toggle horizontal installation EasyPact: fixed CVS630 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX400 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX400 with earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX400 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: plug-in NSX400 with earth leakage protection - control: motor mechanism horizontal installation ComPact: drawout NSX400 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: drawout NSX400 with earth leakage protection - control: motor mechanism horizontal installation ComPact: fixed NSX630 with earth leakage protection - control: direct front rotary handle horizontal installation ComPact: fixed NSX630 with earth leakage protection - control: motor mechanism horizontal installation ComPact: plug-in NSX630 with earth leakage protection - control: direct front rotary handle horizontal installation

[I _e] rated operational current	630 A
[I _n] rated current	630 A
Busbar cross section	32 x 6 mm
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Smooth
Height	200 mm
Width	350 mm
Net weight	3.04 kg

Quantity per set	Set of 1
------------------	----------

Life Is On | Schneider
mechanism

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	3.06 kg
Package 1 Height	16.2 cm
Package 1 width	27.5 cm
Package 1 Length	40 cm
Unit Type of Package 2	P12
Number of Units in Package 2	45
Package 2 Weight	149.7 kg
Package 2 Height	80 cm
Package 2 width	80 cm
Package 2 Length	120 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information