


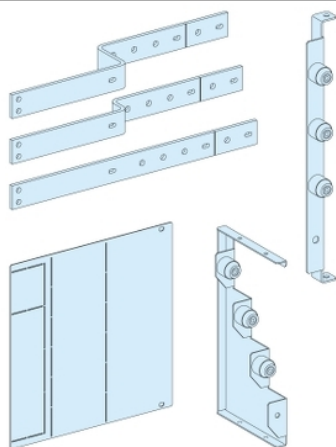

Main

Range	Prisma
Range of product	Prisma P
Product or component type	Connection transfer assembly
Product name	Prisma P enclosure
Accessory / separate part category	Connection accessory
Standards	IEC 61439-2 IEC 61439-1
Product certifications	ASEFA

Complementary

Cubicle-device connection	Connection transfer assembly
Poles description	3P
Installation description	Cubicle + duct - width 650 mm
Installed device	ComPact: fixed NS630b...1000 - control: toggle horizontal installation ComPact: fixed NS630b...1000 - control: direct front rotary handle horizontal installation
[Ie] rated operational current	1600 A
[In] rated current	1600 A
Busbar cross section	80 x 10 mm
Height	375 mm
Width	577 mm
Depth	350 mm
Net weight	17.727 kg
Quantity per set	Set of 1
Functional unit	650 mm 400 mm Prisma P cubicle + duct ComPact NS630b...1000 fixed toggle horizontal 3P 1 connection transfer assembly 8 650 mm 400 mm Prisma P cubicle + duct ComPact NS630b...1000 fixed direct front rotary handle horizontal 3P 1 connection transfer assembly 8

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	17.727 kg
Package 1 Height	10 cm
Package 1 width	35 cm
Package 1 Length	65 cm
Unit Type of Package 2	P12
Number of Units in Package 2	13
Package 2 Weight	230.551 kg
Package 2 Height	80 cm
Package 2 width	80 cm
Package 2 Length	120 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information