


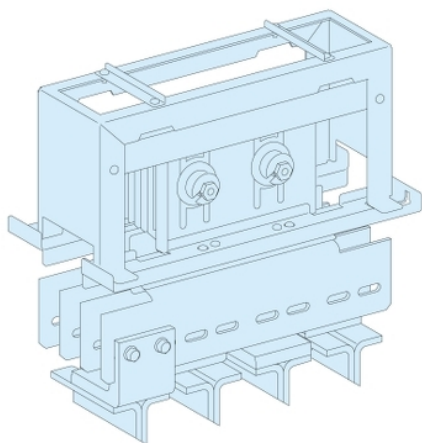

Main

Range	Prisma
Range of product	Prisma P
Product or component type	Interface and connection Canalis
Product name	Prisma P enclosure Canalis KT busbar trunking Masterpact NW circuit breaker
Accessory / separate part category	Interface accessory
Standards	IEC 61439-2, inside enclosure IEC 61439-1, inside enclosure
Product certifications	ASEFA

Complementary

Cubicle-device connection	KT with Canalis
Poles description	4P
Installation description	Cubicle - width 650 mm
Cubicle depth	600 mm: front 600 + 400 mm: rear
Installed device	Masterpact: drawout NW32 - control: toggle vertical installation Masterpact: fixed NW32 - control: toggle vertical installation
[I _e] rated operational current	3200 A
Colour	Stainless steel
Height	350 mm
Width	575 mm
Depth	450 mm
Net weight	70 kg
Quantity per set	Set of 1
Functional unit	650 mm 600 mm Prisma P cubicle Masterpact NW32 drawout toggle vertical 4P 1 front connection on Canalis 28 650 mm 1000 mm Prisma P cubicle Masterpact NW32 drawout toggle vertical 4P 1 rear connection on Canalis 17 650 mm 600 mm Prisma P cubicle Masterpact NW32 fixed toggle vertical 4P 1 front connection on Canalis 28 650 mm 1000 mm Prisma P cubicle Masterpact NW32 fixed toggle vertical 4P 1 rear connection on Canalis 16

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	70 kg
Package 1 Height	60 cm
Package 1 width	60 cm
Package 1 Length	80 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information