


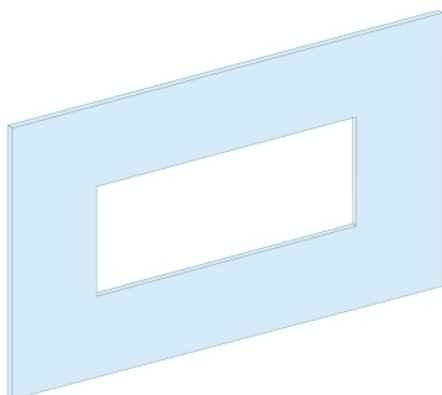

Main

Range	Prisma
Range of product	Prisma G Prisma P
Product or component type	Front plate
Accessory / separate part category	Installation accessory
Range compatibility	Prisma G enclosure Prisma P cubicle
Type of front plate	Cut-out
Installed device	ComPact: fixed INS250 source changeover - control: mechanical interlock - vertical installation ComPact: fixed INV250 source changeover - control: mechanical interlock - vertical installation
Poles description	1 x 3P: mounting plate support: INS250 source changeover vertical installation 1 x 4P: mounting plate support: INS250 source changeover vertical installation 2 x 3P: mounting plate support: INS250 source changeover vertical installation 2 x 4P: mounting plate support: INS250 source changeover vertical installation 1 x 3P: mounting plate support: INV250 source changeover vertical installation 1 x 4P: mounting plate support: INV250 source changeover vertical installation 2 x 3P: mounting plate support: INV250 source changeover vertical installation 2 x 4P: mounting plate support: INV250 source changeover vertical installation
Operating position	Vertical

Complementary

Enclosure/cubicle description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Cubicle - width 650 mm depth 400 mm
Connection position	Direct connection Front connection
Number of vertical modules [50 mm]	5
Standards	IEC 61439-1 IEC 61439-2
Product certifications	ASEFA
Material	Steel
Surface finish	Matt Smooth
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White (RAL 9001)
Height	250 mm
Width	500 mm
Net weight	0.76 kg

Quantity per set	Set of 1
Functional unit	650 mm 400 mm Prisma P cubicle ComPact INS250 source changeover fixed mechanical interlock vertical 3P 2 direct 9 650 mm 400 mm Prisma P cubicle ComPact INS250 source changeover fixed mechanical interlock vertical 4P 2 direct 9 650 mm 400 mm Prisma P cubicle ComPact INV250 source changeover fixed mechanical interlock vertical 3P 2 direct 9 650 mm 400 mm Prisma P cubicle ComPact INV250 source changeover fixed mechanical interlock vertical 4P 2 direct 9 600 mm Prisma G floor-standing enclosure ComPact INS250 source changeover fixed mechanical interlock vertical 3P 1 front connection 10 600 mm Prisma G wall-mounted enclosure ComPact INS250 source changeover fixed mechanical interlock vertical 3P 1 front connection 10 600 mm Prisma G floor-standing enclosure ComPact INS250 source changeover fixed mechanical interlock vertical 4P 1 front connection 10 600 mm Prisma G wall-mounted enclosure ComPact INS250 source changeover fixed mechanical interlock vertical 4P 1 front connection 10 600 mm Prisma G floor-standing enclosure ComPact INV250 source changeover fixed mechanical interlock vertical 3P 1 front connection 10 600 mm Prisma G wall-mounted enclosure ComPact INV250 source changeover fixed mechanical interlock vertical 3P 1 front connection 10 600 mm Prisma G floor-standing enclosure ComPact INV250 source changeover fixed mechanical interlock vertical 4P 1 front connection 10 600 mm Prisma G wall-mounted enclosure ComPact INV250 source changeover fixed mechanical interlock vertical 4P 1 front connection 10

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	760 g
Package 1 Height	3 cm
Package 1 width	26 cm
Package 1 Length	51 cm
Unit Type of Package 2	CAR
Number of Units in Package 2	10
Package 2 Weight	7.92 kg
Package 2 Height	17 cm
Package 2 width	27 cm
Package 2 Length	53 cm
Unit Type of Package 3	P12
Number of Units in Package 3	30
Package 3 Weight	23.76 kg
Package 3 Height	80 cm
Package 3 width	80 cm
Package 3 Length	120 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Halogen content performance	Halogen free plastic parts product