


03243

FRONT PLATE 3-4 NSX/CVS250 VERTICAL FIXED TOGGLE/ROTARY HANDLE WIDTH 600/650 5M



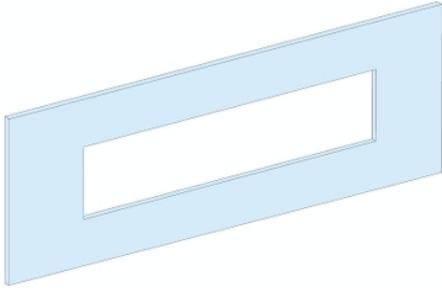

Main

Range	Prisma
Range of product	Prisma G Prisma P
Product or component type	Front plate
Accessory / separate part category	Installation accessory
Range compatibility	Prisma G enclosure Prisma P cubicle
Type of front plate	Cut-out
Installed device	<p>ComPact: fixed NSX100...160 without earth leakage protection - control: toggle - vertical installation</p> <p>ComPact: fixed NSX250 without earth leakage protection - control: toggle - vertical installation</p> <p>EasyPact: fixed CVS100...160 without earth leakage protection - control: toggle - vertical installation</p> <p>EasyPact: fixed CVS100...160 without earth leakage protection - control: direct front rotary handle - vertical installation</p> <p>EasyPact: fixed CVS250 without earth leakage protection - control: toggle - vertical installation</p> <p>EasyPact: fixed CVS250 without earth leakage protection - control: direct front rotary handle - vertical installation</p> <p>ComPact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle - vertical installation</p> <p>ComPact: plug-in NSX100...160 without earth leakage protection - control: toggle - vertical installation</p> <p>ComPact: plug-in NSX100...160 without earth leakage protection - control: direct front rotary handle - vertical installation</p> <p>ComPact: plug-in NSX100...160 without earth leakage protection - control: motor mechanism - vertical installation</p> <p>ComPact: drawout NSX100...160 without earth leakage protection - control: toggle - vertical installation</p> <p>ComPact: drawout NSX100...160 without earth leakage protection - control: direct front rotary handle - vertical installation</p> <p>ComPact: drawout NSX100...160 without earth leakage protection - control: motor mechanism - vertical installation</p> <p>ComPact: fixed NSX100...160 without earth leakage protection - control: motor mechanism - vertical installation</p> <p>ComPact: fixed NSX250 without earth leakage protection - control: direct front rotary handle - vertical installation</p> <p>ComPact: plug-in NSX250 without earth leakage protection - control: toggle - vertical installation</p> <p>ComPact: plug-in NSX250 without earth leakage protection - control: direct front rotary handle - vertical installation</p> <p>ComPact: plug-in NSX250 without earth leakage protection - control: motor mechanism - vertical installation</p> <p>ComPact: drawout NSX250 without earth leakage protection - control: toggle - vertical installation</p> <p>ComPact: drawout NSX250 without earth leakage protection - control: direct front rotary handle - vertical installation</p> <p>ComPact: drawout NSX250 without earth leakage protection - control: motor mechanism - vertical installation</p> <p>ComPact: fixed NSX250 without earth leakage protection - control: motor mechanism - vertical installation</p>

Poles description	4 x 3P: mounting plate support: CVS100...160 vertical installation 3 x 4P: mounting plate support: CVS100...160 vertical installation 4 x 3P: mounting plate support: CVS250 vertical installation 3 x 4P: mounting plate support: CVS250 vertical installation 4 x 3P: mounting plate support: NSX100...160 vertical installation 3 x 4P: mounting plate support: NSX100...160 vertical installation 4 x 3P: mounting plate support: NSX250 vertical installation 3 x 4P: mounting plate support: NSX250 vertical installation 2 x 3P: mounting plate support: NSX100...160 vertical installation 2 x 4P: mounting plate support: NSX100...160 vertical installation 2 x 3P: mounting plate support: NSX250 vertical installation 2 x 4P: mounting plate support: NSX250 vertical installation
Operating position	Vertical

Complementary

Enclosure/cubicle description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Cubicle - width 650 mm depth 400 mm
Connection position	Linergy FC Direct connection
Number of vertical modules [50 mm]	5
Standards	IEC 61439-2 IEC 61439-1
Product certifications	ASEFA
Material	Steel
Surface finish	Matt Smooth
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White (RAL 9001)
Height	250 mm
Width	500 mm
Net weight	0.82 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	700 g
Package 1 Height	3 cm
Package 1 width	26 cm
Package 1 Length	52 cm
Unit Type of Package 2	CAR
Number of Units in Package 2	10
Package 2 Weight	8.3 kg
Package 2 Height	17 cm
Package 2 width	27 cm
Package 2 Length	53 cm
Unit Type of Package 3	P12
Number of Units in Package 3	270
Package 3 Weight	247.2 kg
Package 3 Height	80 cm
Package 3 width	80 cm
Package 3 Length	120 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Halogen content performance	Halogen free plastic parts product