




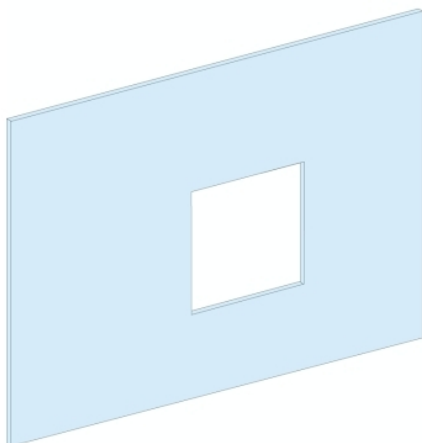

Main

Range	Prisma
Range of product	Prisma G Prisma P
Product or component type	Front plate
Accessory / separate part category	Installation accessory
Range compatibility	Prisma G enclosure Prisma P cubicle
Type of front plate	Cut-out
Installed device	ComPact: fixed NSX400 with earth leakage protection - control: toggle - vertical installation EasyPact: fixed CVS400 with earth leakage protection - control: direct front rotary handle - vertical installation EasyPact: fixed CVS630 with earth leakage protection - control: direct front rotary handle - vertical installation ComPact: fixed NSX400 with earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX400 with earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX400 with earth leakage protection - control: direct front rotary handle - vertical installation ComPact: drawout NSX400 with earth leakage protection - control: toggle - vertical installation ComPact: drawout NSX400 with earth leakage protection - control: direct front rotary handle - vertical installation ComPact: drawout NSX400 with earth leakage protection - control: motor mechanism - vertical installation ComPact: fixed NSX630 with earth leakage protection - control: toggle - vertical installation ComPact: fixed NSX630 with earth leakage protection - control: direct front rotary handle - vertical installation ComPact: plug-in NSX630 with earth leakage protection - control: toggle - vertical installation ComPact: plug-in NSX630 with earth leakage protection - control: direct front rotary handle - vertical installation ComPact: drawout NSX630 with earth leakage protection - control: toggle - vertical installation ComPact: drawout NSX630 with earth leakage protection - control: direct front rotary handle - vertical installation ComPact: drawout NSX630 with earth leakage protection - control: motor mechanism - vertical installation
Poles description	1 x 4P: mounting plate support: NSX400 vertical installation 1 x 3P: mounting plate support: CVS400 vertical installation 1 x 4P: mounting plate support: CVS400 vertical installation 1 x 3P: mounting plate support: CVS630 vertical installation 1 x 4P: mounting plate support: CVS630 vertical installation 1 x 3P: mounting plate support: NSX400 vertical installation 1 x 3P: mounting plate support: NSX630 vertical installation 1 x 4P: mounting plate support: NSX630 vertical installation
Operating position	Vertical

Complementary

Enclosure/cubicle description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Cubicle - width 650 mm depth 400 mm
Connection position	Linergy FC Direct connection
Number of vertical modules [50 mm]	11
Standards	IEC 61439-1 IEC 61439-2
Product certifications	ASEFA
Material	Steel
Surface finish	Matt Smooth
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White (RAL 9001)
Height	550 mm
Width	500 mm
Net weight	2.08 kg

Quantity per set	Set of 1
------------------	----------

Environment

IP degree of protection	IP30
-------------------------	------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	2 kg
Package 1 Height	3 cm
Package 1 width	51 cm
Package 1 Length	56 cm
Unit Type of Package 2	P12
Number of Units in Package 2	48
Package 2 Weight	106.24 kg
Package 2 Height	80 cm
Package 2 width	80 cm
Package 2 Length	120 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
Halogen content performance	Halogen free plastic parts product