


03414

MOUNTING PLATE VIGI NSX/CVS PLUGIN TOGGLE/ROT/MOT - 4P 250A HORIZONTAL WIDTH 650



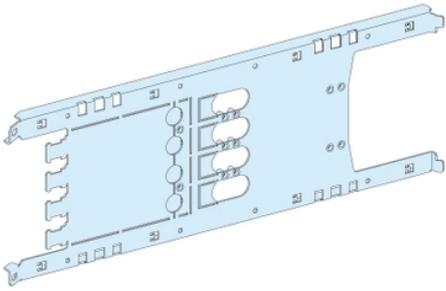

Main

Range	Prisma
Range of product	Prisma P
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	Prisma P cubicle
Installation description	Cubicle - width 650 mm depth 400 mm

Installed device	<p>EasyPact: fixed CVS100...160 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>EasyPact: fixed CVS250 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX250 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>EasyPact: fixed CVS100...160 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>EasyPact: fixed CVS250 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX100...160 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX250 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: fixed NSX100...160 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX100...160 without earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX250 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX250 without earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: plug-in NSX100...160 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX100...160 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX250 without earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX250 without earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX100...160 with earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX100...160 with earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX100...160 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX100...160 with earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX250 with earth leakage protection - control: toggle - horizontal installation</p> <p>ComPact: fixed NSX250 with earth leakage protection - control: motor mechanism - horizontal installation</p> <p>ComPact: plug-in NSX250 with earth leakage protection - control: direct front rotary handle - horizontal installation</p> <p>ComPact: plug-in NSX250 with earth leakage protection - control: motor mechanism - horizontal installation</p>
Poles description	<p>1 x 4P: fixed CVS100...160 horizontal installation</p> <p>1 x 4P: fixed CVS250 horizontal installation</p> <p>1 x 4P: fixed NSX100...160 horizontal installation</p> <p>1 x 4P: fixed NSX250 horizontal installation</p> <p>1 x 4P: plug-in NSX100...160 horizontal installation</p> <p>1 x 4P: plug-in NSX250 horizontal installation</p>

Number of vertical modules [50 mm]	4 module(s): CVS100...160 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): CVS250 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX100...160 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX250 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): CVS100...160 with earth leakage protection , direct in 650 mm Widecubicle 4 module(s): CVS250 with earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX100...160 with earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX250 with earth leakage protection , direct in 650 mm Widecubicle
Standards	IEC 61439-2
Product certifications	ASEFA

Complementary

Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Smooth Matt
Colour	White (RAL 9001)
Width	650 mm
Height	200 mm
Net weight	2.36 kg
Functional unit	650 mm 400 mm Prisma P cubicle EasyPact CVS100...160 without fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle EasyPact CVS250 without fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX100...160 without fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX100...160 without fixed motor mechanism horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX100...160 without plug-in direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX100...160 without plug-in motor mechanism horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX100...160 without plug-in toggle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX250 without fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX250 without fixed motor mechanism horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX250 without plug-in direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX250 without plug-in motor mechanism horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX250 without plug-in toggle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle EasyPact CVS100...160 with fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle EasyPact CVS250 with fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX100...160 with fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX100...160 with fixed motor mechanism horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX100...160 with plug-in direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX100...160 with plug-in motor mechanism horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX100...160 with plug-in toggle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX250 with fixed direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX250 with fixed motor mechanism horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX250 with plug-in direct front rotary handle horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX250 with plug-in motor mechanism horizontal 4P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX250 with plug-in toggle horizontal 4P 1 direct 4 12.5 mm

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	2.5 kg
Package 1 Height	3 cm
Package 1 width	20.1 cm
Package 1 Length	57.2 cm
Unit Type of Package 2	S04
Number of Units in Package 2	8
Package 2 Weight	20.85 kg
Package 2 Height	30 cm
Package 2 width	40 cm
Package 2 Length	60 cm
Unit Type of Package 3	P12
Number of Units in Package 3	64
Package 3 Weight	158 kg
Package 3 Height	75 cm
Package 3 width	80 cm
Package 3 Length	120 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
Halogen content performance	Halogen free plastic parts product