


03453

MOUNTING PLATE VIGI NSX/CVS PLUGIN TOGGLE/ROT/MOT - 3P 630A HORIZONTAL WIDTH 650



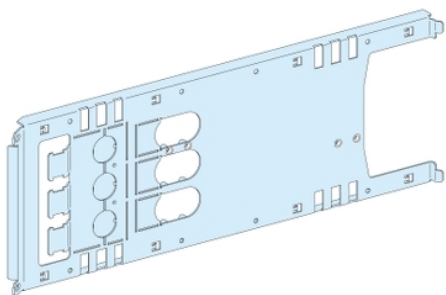

Main

Range	Prisma
Range of product	Prisma P
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	Prisma P cubicle
Installation description	Cubicle - width 650 mm depth 400 mm

Installed device	EasyPact: fixed CVS400 without earth leakage protection - control: direct front rotary handle - horizontal installation EasyPact: fixed CVS630 without earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: plug-in NSX400 without earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX400 without earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: fixed NSX400 without earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX400 without earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: plug-in NSX400 without earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX630 without earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX630 without earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: fixed NSX630 without earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX630 without earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: plug-in NSX630 without earth leakage protection - control: motor mechanism - horizontal installation EasyPact: fixed CVS400 with earth leakage protection - control: direct front rotary handle - horizontal installation EasyPact: fixed CVS630 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: plug-in NSX400 with earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX400 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: fixed NSX400 with earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX400 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: plug-in NSX400 with earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX630 with earth leakage protection - control: toggle - horizontal installation ComPact: fixed NSX630 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: fixed NSX630 with earth leakage protection - control: motor mechanism - horizontal installation ComPact: plug-in NSX630 with earth leakage protection - control: direct front rotary handle - horizontal installation ComPact: plug-in NSX630 with earth leakage protection - control: motor mechanism - horizontal installation
Poles description	1 x 3P: fixed CVS400 horizontal installation 1 x 3P: fixed CVS630 horizontal installation 1 x 3P: fixed NSX400 horizontal installation 1 x 3P: fixed NSX630 horizontal installation 1 x 3P: plug-in NSX400 horizontal installation 1 x 3P: plug-in NSX630 horizontal installation

Number of vertical modules [50 mm]	4 module(s): CVS400 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): CVS630 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX400 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX630 without earth leakage protection , direct in 650 mm Widecubicle 4 module(s): CVS400 with earth leakage protection , direct in 650 mm Widecubicle 4 module(s): CVS630 with earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX400 with earth leakage protection , direct in 650 mm Widecubicle 4 module(s): NSX630 with earth leakage protection , direct in 650 mm Widecubicle 3 module(s): NSX400 without earth leakage protection , direct in 650 mm Widecubicle 3 module(s): NSX630 without earth leakage protection , direct in 650 mm Widecubicle 3 module(s): NSX400 with earth leakage protection , direct in 650 mm Widecubicle 3 module(s): NSX630 with earth leakage protection , direct in 650 mm Widecubicle
Standards	IEC 61439-2
Product certifications	ASEFA

Complementary

Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Smooth
Colour	White (RAL 9001)
Width	650 mm
Height	200 mm

Net weight	2.5 kg
Functional unit	650 mm 400 mm Prisma P cubicle EasyPact CVS400 without fixed direct front rotary handle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle EasyPact CVS630 without fixed direct front rotary handle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX400 without plug-in toggle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX400 without fixed direct front rotary handle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX400 without fixed motor mechanism horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX400 without plug-in direct front rotary handle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX400 without plug-in motor mechanism horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX630 without plug-in toggle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX630 without fixed direct front rotary handle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX630 without fixed motor mechanism horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX630 without plug-in direct front rotary handle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX630 without plug-in motor mechanism horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle EasyPact CVS400 with fixed direct front rotary handle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle EasyPact CVS630 with fixed direct front rotary handle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX400 with plug-in toggle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX400 with fixed direct front rotary handle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX400 with fixed motor mechanism horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX400 with plug-in direct front rotary handle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX400 with plug-in motor mechanism horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX630 with plug-in toggle horizontal 3P 1 direct 3 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX630 with fixed direct front rotary handle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX630 with fixed motor mechanism horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX630 with plug-in direct front rotary handle horizontal 3P 1 direct 4 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact NSX630 with plug-in motor mechanism horizontal 3P 1 direct 4 12.5 mm

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	2.6 kg
Package 1 Height	4 cm
Package 1 width	21 cm
Package 1 Length	58 cm
Unit Type of Package 2	S04
Number of Units in Package 2	9
Package 2 Weight	23.9 kg
Package 2 Height	30 cm
Package 2 width	40 cm
Package 2 Length	60 cm
Unit Type of Package 3	P12
Number of Units in Package 3	108
Package 3 Weight	292.8 kg
Package 3 Height	80 cm
Package 3 width	80 cm
Package 3 Length	120 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
Halogen content performance	Halogen free plastic parts product