


03458

MOUNTING PLATE SOURCE CHANGEOVER NSX/INS/INV 630 3P/4P ROTARY HORIZONTAL

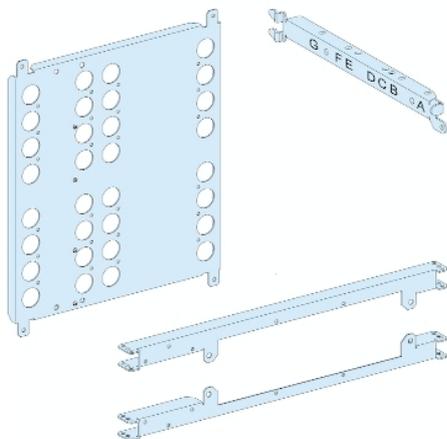

Main

Range	Prisma
Range of product	Prisma P
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	Prisma P cubicle
Installation description	Cubicle - width 650 mm depth 400 mm
Installed device	ComPact: fixed INS320...630 source changeover - control: direct front rotary handle - horizontal installation ComPact: fixed INV320...630 source changeover - control: direct front rotary handle - horizontal installation Source changeover: fixed NSX400...630 source changeover without earth leakage protection - control: direct front rotary handle - horizontal installation
Poles description	2 x 3P: fixed NSX400...630 source changeover horizontal installation 2 x 4P: fixed NSX400...630 source changeover horizontal installation 2 x 3P: fixed INS320...630 source changeover horizontal installation 2 x 4P: fixed INS320...630 source changeover horizontal installation 2 x 3P: fixed INV320...630 source changeover horizontal installation 2 x 4P: fixed INV320...630 source changeover horizontal installation
Number of vertical modules [50 mm]	10 module(s): NSX400...630 source changeover without earth leakage protection , direct in 650 mm Widecubicle 10 module(s): INS320...630 source changeover, direct in 650 mm Widecubicle 10 module(s): INV320...630 source changeover, direct in 650 mm Widecubicle
Standards	IEC 61439-2
Product certifications	ASEFA

Complementary

Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Smooth
Colour	White (RAL 9001)
Width	386 mm
Height	450 mm

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Net weight	4.56 kg
Functional unit	650 mm 400 mm Prisma P cubicle ComPact INS320...630 source changeover fixed direct front rotary handle horizontal 3P 2 direct 10 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact INS320...630 source changeover fixed direct front rotary handle horizontal 4P 2 direct 10 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact INV320...630 source changeover fixed direct front rotary handle horizontal 3P 2 direct 10 12.5 mm 650 mm 400 mm Prisma P cubicle ComPact INV320...630 source changeover fixed direct front rotary handle horizontal 4P 2 direct 10 12.5 mm 650 mm 400 mm Prisma P cubicle source changeover NSX400...630 source changeover without fixed direct front rotary handle horizontal 3P 2 direct 10 12.5 mm 650 mm 400 mm Prisma P cubicle source changeover NSX400...630 source changeover without fixed direct front rotary handle horizontal 4P 2 direct 10 12.5 mm

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	4.56 kg
Package 1 Height	4 cm
Package 1 width	38.5 cm
Package 1 Length	56.5 cm
Unit Type of Package 2	S04
Number of Units in Package 2	5
Package 2 Weight	23.8 kg
Package 2 Height	30 cm
Package 2 width	40 cm
Package 2 Length	60 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
Halogen content performance	Halogen free plastic parts product