


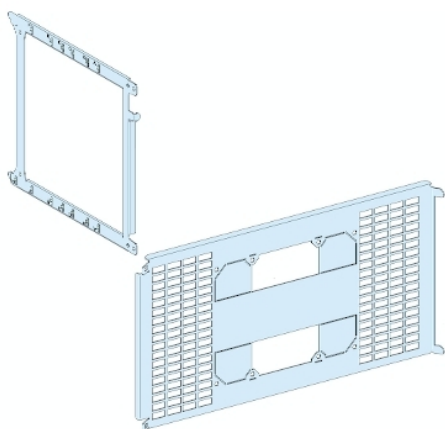

Main

Range	Prisma
Range of product	Prisma P
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	Prisma P cubicle
Installation description	Cubicle - width 650 mm depth 400 mm Cubicle - width 650 mm depth 800 mm
Installed device	ComPact: fixed NS1250 - control: toggle - vertical installation ComPact: fixed NS1250 - control: direct front rotary handle - vertical installation ComPact: fixed NS1250 - control: motor mechanism - vertical installation ComPact: fixed NS1600 - control: toggle - vertical installation ComPact: fixed NS1600 - control: direct front rotary handle - vertical installation ComPact: fixed NS1600 - control: motor mechanism - vertical installation ComPact: fixed NS630b...1000 - control: toggle - vertical installation ComPact: fixed NS630b...1000 - control: direct front rotary handle - vertical installation ComPact: fixed NS630b...1000 - control: motor mechanism - vertical installation
Poles description	1 x 3P: fixed NS1250 vertical installation 1 x 4P: fixed NS1250 vertical installation 1 x 3P: fixed NS1600 vertical installation 1 x 4P: fixed NS1600 vertical installation 1 x 3P: fixed NS630b...1000 vertical installation 1 x 4P: fixed NS630b...1000 vertical installation
Number of vertical modules [50 mm]	17 module(s): NS1250, front connection on Canalis in 650 mm Widecubicle 16 module(s): NS1250, rear connection on Canalis in 650 mm Widecubicle 14 module(s): NS1250, front connection on adaptor in 650 mm Widecubicle 10 module(s): NS1250, rear connection on adaptor in 650 mm Widecubicle 16 module(s): NS1600, rear connection on Canalis in 650 mm Widecubicle 14 module(s): NS1600, front connection on adaptor in 650 mm Widecubicle 10 module(s): NS1600, rear connection on adaptor in 650 mm Widecubicle 17 module(s): NS630b...1000, front connection on Canalis in 650 mm Widecubicle 16 module(s): NS630b...1000, rear connection on Canalis in 650 mm Widecubicle 12 module(s): NS630b...1000, front connection on adaptor in 650 mm Widecubicle 10 module(s): NS630b...1000, rear connection on adaptor in 650 mm Widecubicle
Standards	IEC 61439-2
Product certifications	ASEFA

Complementary

Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Smooth
Colour	White (RAL 9001)
Width	650 mm
Height	300 mm

Net weight	3.08 kg
------------	---------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	3.2 kg
Package 1 Height	4.5 cm
Package 1 width	30.5 cm
Package 1 Length	58 cm
Unit Type of Package 2	S04
Number of Units in Package 2	7
Package 2 Weight	22.32 kg
Package 2 Height	30 cm
Package 2 width	40 cm
Package 2 Length	60 cm
Unit Type of Package 3	P12
Number of Units in Package 3	84
Package 3 Weight	267.84 kg
Package 3 Height	80 cm
Package 3 width	80 cm
Package 3 Length	120 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
Halogen content performance	Halogen free plastic parts product