


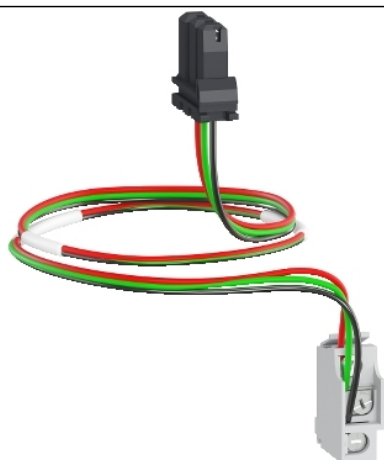

Main

Range	Masterpact
Device short name	OF Micro switch PF SDE
Product or component type	Auxiliary contact block
Device application	Control
Range compatibility	Masterpact MTZ2 circuit breaker Masterpact MTZ3 circuit breaker

Complementary

Auxiliary contacts type	Standard
Signal contacts composition	4 NO/NC
Breaking capacity	6 A AC-12 240/380 V AC 50/60 Hz 2 A AC-12 480 V AC 50/60 Hz 0.3 A DC-12 125 V DC 0.15 A DC-12 250 V DC 3 A AC-12 690 V AC 50/60 Hz
Minimum load	100 mA at 24 V

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	20 g
Package 1 Height	3 cm
Package 1 width	8 cm
Package 1 Length	8 cm
Unit Type of Package 2	BB1
Number of Units in Package 2	8
Package 2 Weight	222 g
Package 2 Height	18 cm
Package 2 width	6 cm
Package 2 Length	27 cm
Unit Type of Package 3	S03
Number of Units in Package 3	64
Package 3 Weight	2.176 kg
Package 3 Height	30 cm
Package 3 width	30 cm
Package 3 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information