


# Product data sheet

## Characteristics

LV431569

CT module and voltage output - 250 A - 3 poles  
- for NSX100...250

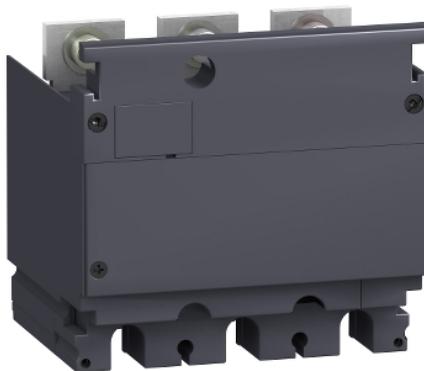

### Main

Device short name	CT module and voltage output
Product or component type	Current transformer
Device application	Control
Range compatibility	ComPact NSX250
Poles description	3P
[In] rated current	250 A
Current transformer ratio	250/5 A
Power consumption in VA	1.1 VA
Accuracy class	Class 1

### Complementary

[Ue] rated operational voltage	530 V
Network type	AC
Network frequency	50/60 Hz
Auxiliary connection terminal	Cable connector 2.5 mm <sup>2</sup>

### Environment

Electrical shock protection class	Class II
IP degree of protection	IP40 conforming to IEC 60529
IK degree of protection	IK04 conforming to IEC 62262

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	991 g
Package 1 Height	13.5 cm
Package 1 width	14 cm
Package 1 Length	17.5 cm
Unit Type of Package 2	S03
Number of Units in Package 2	4
Package 2 Weight	4.451 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> REACH Declaration
EU RoHS Directive	Compliant <input checked="" type="checkbox"/> EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	<input checked="" type="checkbox"/> Yes
China RoHS Regulation	<input checked="" type="checkbox"/> China RoHS Declaration

---

Environmental Disclosure

 Product Environmental Profile

Circularity Profile

 End Of Life Information

---

**Contractual warranty**

---

Warranty

18 months

---