


Product data sheet

Characteristics

LV431515

trip unit MicroLogic 6.2 A for ComPact NSX

250 circuit breakers, electronic, rating 250A, 4 poles 4d

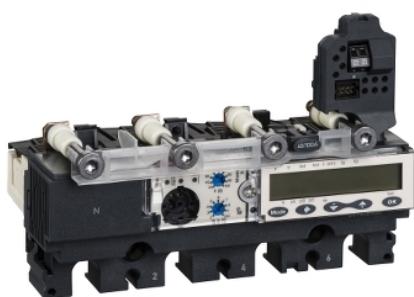

Main

Range	ComPact
Range of product	ComPact NSX100...250
Product or component type	Trip unit
Trip unit name	Micrologic 6.2 A
Trip unit technology	Electronic
Range compatibility	ComPact NSX250
Device application	Distribution
Number of poles	4P
Protected poles description	3t + OSN 3t + N/2 4t 3t
Neutral position	Left
Trip unit protection functions	LSIG
Protection type	L : for overload protection (long time) S : for short time short-circuit protection I : for instantaneous short-circuit protection G : for ground fault protection
Trip unit rated current	250 A at 40 °C
[Ue] rated operational voltage	690 V AC 50/60 Hz
Network type	AC
Network frequency	50/60 Hz

Complementary

Long-time pick-up adjustment type Ir (thermal protection)	Adjustable 9 settings
[Ir] long-time protection pick-up adjustment range	100...250 A
Long-time protection delay adjustment type tr	Adjustable
[tr] long-time protection delay adjustment range	15...400 S at $1.5 \times Ir$ 0.35...11 S at $7.2 \times Ir$ 0.5...16 s at $6 \times Ir$
Thermal memory	20 minutes before and after tripping
Short-time protection pick-up adjustment type Isd	Adjustable 9 settings
[Isd] Short-time protection pick-up adjustment range	1.5...10 $\times Ir$
Short-time protection delay adjustment type tsd	Adjustable
[tsd] Short-time protection delay adjustment range	0...0.4 S $I^2t=off$ 0.1...0.4 s $I^2t=on$
Instantaneous protection pick-up adjustment type li	Adjustable
[li] instantaneous protection pick-up adjustment range	1.5...12 $\times In$
Ground-fault protection pick-up adjustment type lg	Adjustable
[lg] ground-fault protection pick-up adjustment range	0.2...1 $\times In$ for $In = 40 A$ 0.4...1 $\times In$ for $In > 40 A$ lg enable on/off
Ground-fault protection time delay adjustment type tg	Adjustable
[tg] ground-fault protection time delay adjustment range	0...0.4 S $I^2t=off$ 0.1...0.4 s $I^2t=on$

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Earth-leakage protection	Without
Neutral protection settings	0.5 x Ir (3t + N/2) 1 x Ir (4t) 1.6 x Ir (3t + OSN) No protection (3t)
Zone selective interlocking ZSI	With
Local signalling	Flashing LED (green) for ready to operate LED 105 % Ir (red) for overload LED 90 % Ir (orange) for overload
Display type	LCD display
Type of measurement	Ammeter
Communication of data	Maintenance indicators Maximeters/Minimeters Instantaneous and demand values Energy metering Power quality Time-stamped histories and event tables Demand current and power Protection and alarm settings
Electrical data recording	Maintenance indicators

Environment

Standards	UL 508 EN/IEC 60947-2
Product certifications	CCC EAC Marine
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-40...85 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	660 g
Package 1 Height	9.5 cm
Package 1 width	11 cm
Package 1 Length	15 cm
Unit Type of Package 2	S03
Number of Units in Package 2	11
Package 2 Weight	7.7 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> REACH Declaration
EU RoHS Directive	Compliant <input checked="" type="checkbox"/> EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	<input checked="" type="checkbox"/> Yes
China RoHS Regulation	<input checked="" type="checkbox"/> China RoHS Declaration
Environmental Disclosure	<input checked="" type="checkbox"/> Product Environmental Profile
Circularity Profile	<input checked="" type="checkbox"/> End Of Life Information

Contractual warranty

Warranty	18 months
----------	-----------