


Product data sheet

Characteristics

LV430500

trip unit MA150 for ComPact NSX 160/250
circuit breakers, magnetic, rating 150 A, 3
poles 3d

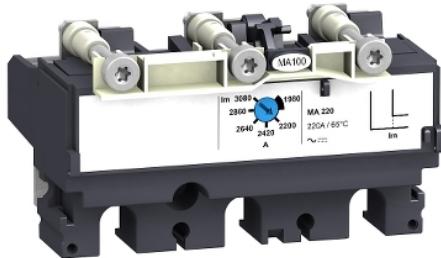

Main

Range	ComPact
Range of product	ComPact NSX100...250
Product or component type	Trip unit
Trip unit name	MA
Trip unit technology	Magnetic
Range compatibility	ComPact NSX160 ComPact NSX250
Device application	Motor
Number of poles	3P
Protected poles description	3t
Trip unit protection functions	I
Protection type	I : for short-circuit protection (magnetic)
Trip unit rated current	150 A at 65 °C
[Ue] rated operational voltage	690 V AC 50/60 Hz
Network type	AC
Network frequency	50/60 Hz

Complementary

Instantaneous protection pick-up adjustment type li	Adjustable
[lii] instantaneous protection pick-up adjustment range	9...14 x In
Earth-leakage protection	Without

Environment

Standards	UL 508 EN/IEC 60947-2
Product certifications	EAC CCC Marine
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-50...85 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	410 g
Package 1 Height	9.9 cm
Package 1 width	6.7 cm
Package 1 Length	11.3 cm
Unit Type of Package 2	S03
Number of Units in Package 2	28
Package 2 Weight	11.995 kg
Package 2 Height	30 cm

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Compliant  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------
