


Product data sheet

Characteristics

LV432093

trip unit MicroLogic 5.3 A for ComPact NSX
630 A circuit breakers, electronic, rating 630A,
4 poles 4d

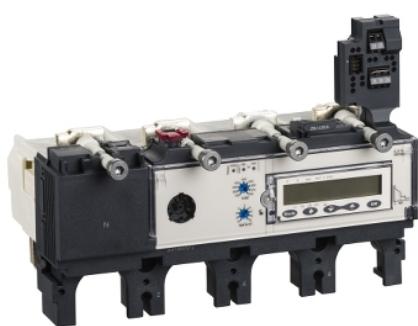

Main

Range	ComPact
Range of product	ComPact NSX400...630
Product or component type	Trip unit
Trip unit name	Micrologic 5.3 A
Trip unit technology	Electronic
Range compatibility	ComPact NSX630
Device application	Distribution
Number of poles	4P
Protected poles description	4t 3t + N/2 3t + OSN 3t
Neutral position	Left
Trip unit protection functions	LSI
Protection type	L : for overload protection (long time) S : for short time short-circuit protection I : for instantaneous short-circuit protection
Trip unit rated current	630 A at 40 °C
[Ue] rated operational voltage	690 V AC 50/60 Hz
Network type	AC
Network frequency	50/60 Hz

Complementary

Long-time pick-up adjustment type Ir (thermal protection)	Adjustable 9 settings
[Ir] long-time protection pick-up adjustment range	250...630 A
Long-time protection delay adjustment type tr	Adjustable
[tr] long-time protection delay adjustment range	15...400 S at $1.5 \times Ir$ 0.35...11 S at $7.2 \times Ir$ 0.5...16 s at $6 \times Ir$
Thermal memory	20 minutes before and after tripping
Short-time protection pick-up adjustment type Isd	Adjustable 9 settings
[Isd] Short-time protection pick-up adjustment range	1.5...10 $\times Ir$
Short-time protection delay adjustment type tsd	Adjustable
[tsd] Short-time protection delay adjustment range	0...0.4 S $I^2t=off$ 0.1...0.4 s $I^2t=on$
Instantaneous protection pick-up adjustment type li	Adjustable
[li] instantaneous protection pick-up adjustment range	1.5...11 $\times In$
Earth-leakage protection	Without
Neutral protection settings	0.5 $\times Ir$ (3t + N/2) 1 $\times Ir$ (4t) 1.6 $\times Ir$ (3t + OSN) No protection (3t)
Zone selective interlocking ZSI	With

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Local signalling	Flashing LED (green) for ready to operate LED 105 % Ir (red) for overload LED 90 % Ir (orange) for overload
Display type	LCD display
Type of measurement	Ammeter
Communication of data	Time-stamped histories and event tables Power quality Protection and alarm settings Demand current and power Energy metering Maintenance indicators Instantaneous and demand values Maximeters/minimeters
Electrical data recording	Maintenance indicators

Environment

Standards	UL 508 EN/IEC 60947-2
Product certifications	EAC CCC Marine
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-40...85 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	1.81 kg
Package 1 Height	13.5 cm
Package 1 width	17.5 cm
Package 1 Length	21.5 cm
Unit Type of Package 2	S04
Number of Units in Package 2	10
Package 2 Weight	18.78 kg
Package 2 Height	30 cm
Package 2 width	40 cm
Package 2 Length	60 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Compliant  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------