


Product data sheet

Characteristics

KTB0000CR4

Feed unit protective cover, Canalis KTA 800-4000A, KTC 1000-5000A, dry-type transformer, vertical, EL N1 to N4 feed unit

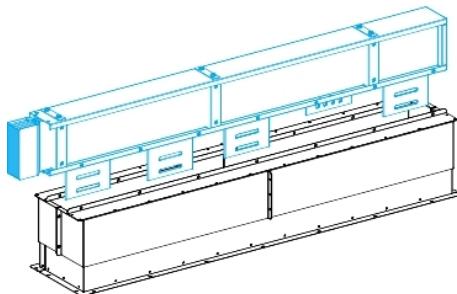

Main

Range	Canalis
Product name	KT
Product or component type	Protective cover
Product compatibility	Canalis KTA busbar trunking 800...4000 A Canalis KTC busbar trunking 1000...5000 A
Accessory / separate part category	Protection accessory
Incomer position	Vertical
Transformer type	Dry type transformer

Complementary

Mounting mode	By screws
Length	1690 mm
Height	200...350 mm
Width	340 mm
Net weight	24 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	31.3 cm
Package 1 Width	169.0 cm
Package 1 Length	34.0 cm
Package 1 Weight	27.0 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<input checked="" type="checkbox"/> REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <input checked="" type="checkbox"/> EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<input checked="" type="checkbox"/> China RoHS Declaration
RoHS exemption information	<input checked="" type="checkbox"/> Yes
Environmental Disclosure	<input checked="" type="checkbox"/> Product Environmental Profile
Circularity Profile	<input checked="" type="checkbox"/> End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
PVC free	Yes
Halogen content performance	Halogen free product

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.