


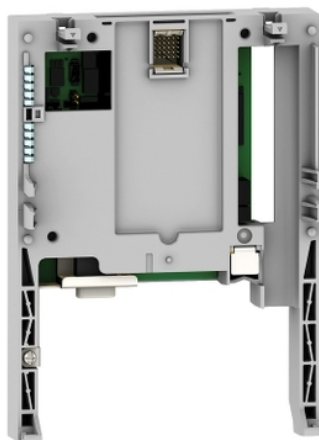

Main

Product or component type	Communication card
Range compatibility	Altivar 71Q Altivar 61 Altivar 61Q Altivar 71
Communication port protocol	Uni-Telway Modbus ASCII Modbus RTU
Connector type	9-way female SUB-D connector
Transmission rate	19200 bps 4800 bps 9600 bps
Type of polarization	Two 4.7 kOhm polarization resistors No polarization impedances
Physical interface	2-wire RS 485 for Modbus 4-wire RS485 for Modbus 2-wire RS 485 for Uni-Telway

Complementary

Number of addresses	1...147 for Uni-Telway 1...247 for Modbus
Data format	7 bits, odd or even parity, 1 or 2 stop for Modbus ASCII 7 bits, odd or even parity, 1 or 2 stop for Modbus RTU 8 bits, no parity, 2 stop for Modbus RTU 8 bits, odd, even or no parity, 1 stop for Modbus RTU 8 bits, odd parity, 1 stop for Uni-Telway
Communication service	CiA 402 profile for Modbus Communication monitoring for Modbus Diagnostics (08) for Modbus I/O profile for Modbus Mirror (FAh) for Uni-Telway Protocol version (30h) for Uni-Telway Read device identification (43) for Modbus Read error counters (A2h) for Uni-Telway Read holding registers (03) for Modbus Read input registers (04) for Modbus Read object (36h) for Uni-Telway Read word (04h) for Uni-Telway Read/Write multiple registers (23) for Modbus Reset counters (A4h) for Uni-Telway Write multiple registers (16) for Modbus Write object (37h) for Uni-Telway Write single register (06) for Modbus Write word (14h) for Uni-Telway Identification of the card for Uni-Telway Communication monitoring can be inhibited, fixed
Display type	1 LED for ERR (fault) 1 LED for RUN (status) Graphic display terminal for control word received Graphic display terminal for reference received
Net weight	0.3 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	287 g
Package 1 Height	7.2 cm
Package 1 width	17 cm
Package 1 Length	23.5 cm
Unit Type of Package 2	S03
Number of Units in Package 2	7
Package 2 Weight	2.52 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------