


BCPMB236S

BCPM power monitoring intermediate - 36 solid core 100 A - 18 mm CT spacing

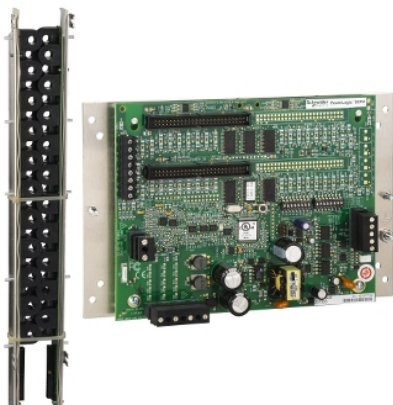

Main

Range	PowerLogic
Product name	PowerLogic BCPM
Product or component type	Multi-circuit energy meter
Device short name	BCPMB
Model type	Intermediate
Power monitoring	Basic instrumentation
Energy management	Sub billing and cost allocation
Device application	Sub billing
Power quality analysis	Voltage sag and swell detection
Type of measurement	Voltage Current Frequency Active power Power factor Active energy
[Us] rated supply voltage	90...277 V AC 50/60 Hz +/- 1 %
Network frequency	60 Hz 50 Hz

Complementary

Current transformer input	Solid core CT 100 A36 x
Update time	1.8 s
Measurement voltage	90...277 V phase to neutral 150...480 V phase to phase
Measurement accuracy	Branch current 2 % 0.25...2 A Branch current 1 % 2...100 A Mains current 3 % 1...100 % Mains current 3 % 2...100 % Voltage 1 % 90...277 V
Sampling rate	256 samples/cycle
Connection pitch	18 mm
Provided equipment	36 x current transformer
Communication port protocol	Modbus RTU
Communication port support	RS485
Communication of data	High-high current alarm Low-low current alarm High current alarm Low current alarm Under voltage alarm Over voltage alarm

Environment

Mounting mode	Panel-mounted
Mounting support	Panel Enclosure
Relative humidity	0...95 % at 0...60 °C
Ambient air temperature for storage	-40...70 °C
Operating altitude	3000 m

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Standards	IEC 61036 EN 61010 UL 508 ANSI C12.1
Product certifications	UL
Width	288 mm
Height	146 mm
Net weight	1.5 kg

Packing Units

Package 1 Weight	2863.640 g
Package 1 Height	152.000 mm
Package 1 width	305.000 mm
Package 1 Length	508.000 mm

Offer Sustainability

REACH Regulation	 REACH Declaration
EU RoHS Directive	Compliant  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins