



Main

Range of product	Phaseo Rectified
Product or component type	Power supply
Power supply type	Rectified and filtered
Rated power in W	12 W
Nominal input voltage	230 V AC single phase, terminal(s): N-L1 400 V AC phase to phase, terminal(s): L1-L2
Output voltage	24 V DC
Power supply output current	0.5 A
Anti-harmonic filter	Low frequency harmonic currents
Product certifications	UL 508 CULus KC EAC

Complementary

Network frequency limits	47...63 Hz
Input voltage limits	207...253 V 360...440 V
Power Factor	0.656 at 230 V 0.881 at 400 V
Efficiency	71 %
Power dissipation in W	3.48 W
Output coupling	Parallel Series
Output protection type	Against overload and short-circuits, protection technology: internal fuse, 0.5 A, 5 x 20 mm, T curve Against overvoltage, protection technology: 2 J peak limiter
Hold-up time	17 ms
Status LED	1 LED (green)output voltage 1 LED (orange)input voltage
Residual ripple	<= 1200 mV
Connections - terminals	For input connection: screw type terminals, connection capacity: 5 x 2.5...5 x 4 mm ² AWG 14...AWG 11 For input ground connection: screw type terminals, connection capacity: 1 x 2.5...1 x 4 mm ² AWG 14...AWG 11 For output connection: screw type terminals, connection capacity: 4 x 2.5...4 x 4 mm ² AWG 14...AWG 11
Depth	124 mm
Height	108 mm
Width	87 mm
Net weight	1.28 kg
Compatibility code	ABL8F

Environment

IP degree of protection	IP20 conforming to EN/IEC 60529
Ambient air temperature for operation	-20...60 °C
Ambient air temperature for storage	-40...80 °C
Relative humidity	0...95 % without condensation or dripping water
Operating altitude	3000 m

Vibration resistance	0.05 mm (f= 47...57 Hz) conforming to IEC 60068-1 0.7 gn (f= 13.9...47 Hz) conforming to IEC 60068-1 1 gn (f= 57...150 Hz) conforming to IEC 60068-1 1 mm (f= 3...13.9 Hz) conforming to IEC 60068-1
Safety class	Class I conforming to VDE 0106-1
Dielectric strength	2000 V between input and ground 4600 V between input and output 500 V between output and ground
Other environmental characteristic	EMC conforming to IEC 62041 Safety conforming to EN/IEC 61558-2-6 Safety conforming to UL 508 Safety conforming to UL 60950-1 EMC conforming to EN/IEC 61000-3-2

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	1.607 kg
Package 1 Height	11.5 cm
Package 1 width	18.5 cm
Package 1 Length	25.5 cm
Unit Type of Package 2	P06
Number of Units in Package 2	30
Package 2 Weight	61.21 kg
Package 2 Height	80 cm
Package 2 width	80 cm
Package 2 Length	60 cm


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

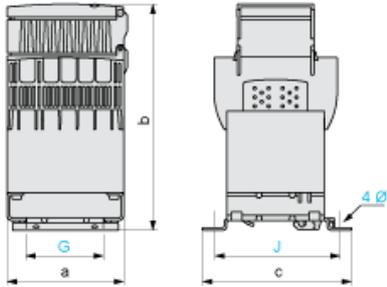


Dimensions in mm

a	b	c	G	J	Ø
87	124	108	60	96	5.5


Dimensions in in.

a	b	c	G	J	Ø
3.42	4.88	4.25	2.36	3.78	0.22

Internal Wiring Diagram

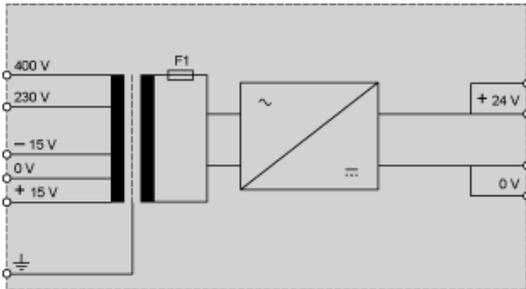

Load Limits Curve

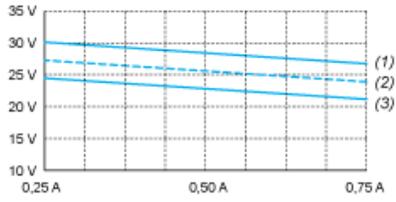

- (1) Nominal line supply + 10%
- (2) Nominal line supply
- (3) Nominal line supply - 10%