


Product data sheet

Characteristics

KRA2500ER36

Flat elbow feed unit, Canalis KRA, aluminium, 2500A, 3L, made to measure dimensions, flat connection pads, grey RAL7030

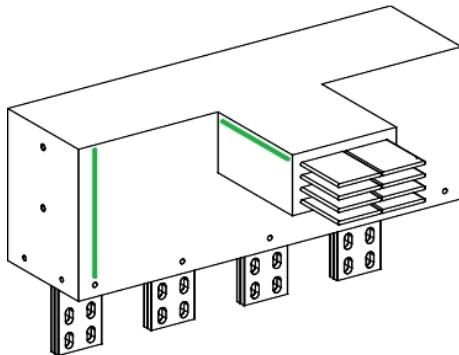

Main

| | |
|---------------------------------------|---|
| Range | Canalis |
| Product name | KR |
| Product or component type | Flatwise elbow feeder trunking |
| Device short name | KRA |
| Product specific application | Enterprise data centres Real estate and office buildings Healthcare Water and waste water Oil and gas Mining minerals and metals |
| Device application | Feeder length |
| Supply | Switchboard Oil-immersed transformer |
| Material | Aluminium |
| [Ie] rated operational current | 2500 A at 35 °C |
| Busbar/connection pads direction type | Flat to straight |
| Short-circuit level | Standard version |

Complementary

| | |
|--|--|
| Housing material | Mineral epoxy resin |
| Contacts material | Tinned aluminium |
| [Ue] rated operational voltage | 1000 V |
| Network frequency | 50/60 Hz |
| [Ui] rated insulation voltage | 1000 V |
| [Icw] rated short-time withstand current | 80 kA |
| [Ipk] rated peak withstand current | 176 kA |
| Radiated magnetic field | 27.94 mT |
| Thermal stress limit | 6400000 kA ² .s |
| Maximum voltage drop | <0.0045 V with power factor = 1 at 50 Hz with 1A for 100 m long <0.0062 V with power factor = 0.9 at 50 Hz with 1A for 100 m long <0.0066 V with power factor = 0.8 at 50 Hz with 1A for 100 m long <0.0067 V with power factor = 0.7 at 50 Hz with 1A for 100 m long |
| Mounting location | Outdoor Indoor |
| Busbar incoming | Horizontal |
| Polarity | 3L |
| Product certifications | EAC[RETURN]CE[RETURN]ATEX |
| Standards | IEC 61439-6 |
| Dimension type | Made to measure |
| Colour | Grey (RAL 7030) |
| Linear load | 61 kg/m |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Environment

| | |
|------------------------------|---|
| IP degree of protection | IP68 conforming to IEC 60529 |
| IK degree of protection | IK10 conforming to IEC 62262 |
| Pollution degree | 3 |
| Fire resistance | 760 °C 180 min conforming to IEC 60331-1 |
| Derating factor | 0...35 °C (100 % of In) 35...40 °C (96 % of In) 40...45 °C (89 % of In) 45...50 °C (84 % of In) 50...55 °C (78 % of In) |
| Operating altitude | 1000 m 100 % of In (indoor) 2000 m 99 % of In (indoor) 3000 m 96 % of In (indoor) 4000 m 90 % of In (indoor) 1000 m 98 % of In (outdoor) 2000 m 94 % of In (outdoor) 3000 m 89 % of In (outdoor) 4000 m 83 % of In (outdoor) |
| Environmental characteristic | EMC directive conforming to IEC 61439-6 |

Packing Units

| | |
|------------------------------|------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 28.0 cm |
| Package 1 Width | 70.0 cm |
| Package 1 Length | 100.0 cm |
| Package 1 Weight | 108.885 kg |

Offer Sustainability

| | |
|-----------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation |  REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Compliant  EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| China RoHS Regulation |  China RoHS Declaration |
| RoHS exemption information |  Yes |
| Environmental Disclosure |  Product Environmental Profile |
| Circularity Profile |  End Of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Halogen content performance | Halogen free product |