


Product data sheet

Characteristics

LVS03410

Mounting Plate, PrismaSeT P, for 5/4 NSXm
Toggle/Rotative 3P/4P Vertical fixed, enclosure
W650mm

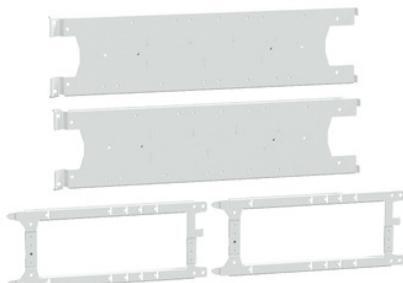

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT P cubicle ComPact ComPact NSXm circuit breaker
Installation description	Cubicle - width 650 mm depth 400 mm
Mounting plate description	Dedicated
Installed device	ComPact: fixed NSXm without earth leakage protection - control: toggle - vertical installation ComPact: fixed NSXm without earth leakage protection - control: direct rotary handle - vertical installation
Poles description	5 x 3P: fixed NSXm vertical installation 4 x 4P: fixed NSXm vertical installation
Number of vertical modules [50 mm]	8 module(s): NSXm without earth leakage protection , direct
Standards	IEC 61439-2
Product certifications	ASTA

Complementary

Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Textured
Colour	White (RAL 9003)
Width	575 mm
Height	150 mm
Functional unit	650 mm 400 mm PrismaSeT P cubicle ComPact NSXm without fixed toggle vertical 3P 5 direct 8 162.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSXm without fixed toggle vertical 4P 4 direct 8 162.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSXm without fixed direct rotary handle vertical 3P 5 direct 8 162.5 mm 650 mm 400 mm PrismaSeT P cubicle ComPact NSXm without fixed direct rotary handle vertical 4P 4 direct 8 162.5 mm

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.5 cm
Package 1 Width	14.5 cm
Package 1 Length	58.0 cm
Package 1 Weight	2.547 kg
Unit Type of Package 2	S04
Number of Units in Package 2	6

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Package 2 Height	30.0 cm
Package 2 Width	40.0 cm
Package 2 Length	60.0 cm
Package 2 Weight	16.021 kg
Unit Type of Package 3	P12
Number of Units in Package 3	72
Package 3 Height	102.0 cm
Package 3 Width	80.0 cm
Package 3 Length	120.0 cm
Package 3 Weight	205.5 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	No need of specific recycling operations
PVC free	Yes
Halogen content performance	Halogen free plastic parts product