


Product data sheet

Characteristics

LVS04423

connection, Linergy LGY, for NSX250, 3P, 250A, horizontal plug-in with toggle

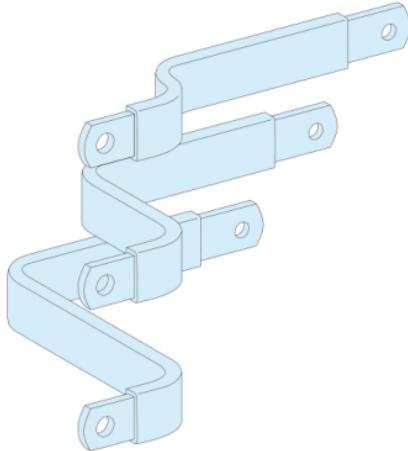

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Connection
Product name	PrismaSeT PrismaSeT P enclosure
Accessory / separate part category	Connection accessory
Standards	IEC 61439-2, inside enclosure IEC 61439-1, inside enclosure
Product certifications	ASTA

Complementary

Cubicle-device connection	Linergy busbar
Poles description	3P
Installation description	Cubicle - width 650 mm
Installed device	ComPact: fixed NSX100...160 with earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX250 with earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX100...160 without earth leakage protection - control: toggle horizontal installation ComPact: fixed NSX250 without earth leakage protection - control: toggle horizontal installation
[Ie] rated operational current	250 A
Net weight	1.02 kg
Quantity per set	Set of 1
Functional unit	650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 without fixed toggle horizontal 3P 1 direct 3 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 without fixed toggle horizontal 3P 1 direct 3 650 mm 400 mm PrismaSeT P cubicle ComPact NSX100...160 with fixed toggle horizontal 3P 1 direct 3 650 mm 400 mm PrismaSeT P cubicle ComPact NSX250 with fixed toggle horizontal 3P 1 direct 3

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.500 cm
Package 1 Width	27.500 cm
Package 1 Length	30.000 cm
Package 1 Weight	981.000 g
Unit Type of Package 2	P12
Number of Units in Package 2	60
Package 2 Height	35.000 cm
Package 2 Width	80.000 cm
Package 2 Length	120.000 cm
Package 2 Weight	70.000 kg

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	No need of specific recycling operations