Product data sheet
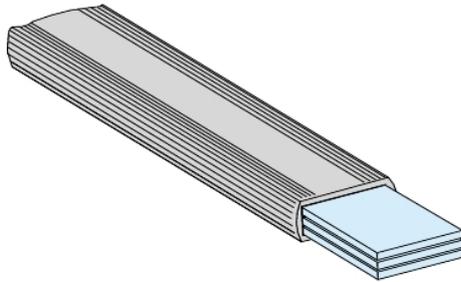## Characteristics

LVS04752
Insulated flexible bar, PrismaSeT P and G, 580 A, busbar size 32 x 6mm, length 1800mm, set of 1

Green Premium™

Main

Range	PrismaSeT
Range of product	PrismaSeT G PrismaSeT P
Product or component type	Insulated flexible bar
Product name	PrismaSeT PrismaSeT G enclosure PrismaSeT PrismaSeT P enclosure
Accessory / separate part category	Current distribution accessory
Standards	IEC 61439-2, inside enclosure IEC 61439-1, inside enclosure
Product certifications	ASTA

Complementary

Installation description	Cubicle Floor-standing enclosure Wall-mounted enclosure
Installed device	ComPact: INS500...630 ComPact: INV500...630
[Ie] rated operational current	580 A
Busbar cross section	32 x 6 mm
Length	1800 mm
Net weight	3.88 kg
Quantity per set	Set of 1

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.0 cm
Package 1 Width	11.5 cm
Package 1 Length	194.0 cm
Package 1 Weight	3.775 kg
Unit Type of Package 2	P2M
Number of Units in Package 2	100
Package 2 Height	29.0 cm
Package 2 Width	120.0 cm
Package 2 Length	200.0 cm
Package 2 Weight	399.0 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes

Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations

Life Is On | Schneider Electric