

Main

Range of product	Canalis
Product name	KS
Product or component type	Multiple elbow
Busbar description	Fire barrier
Device application	Change direction
[Ie] rated operational current	100 A at 35 °C 160 A at 35 °C 250 A at 35 °C
Direction change type	Direction 3: flat to right - neutral to left Direction 1: edgewise to upward - neutral to down

Complementary

[Ue] rated operational voltage	230...690 V
Network frequency	50/60 Hz
Dimension type	Made to measure
Operating angle	90 °
Mounting mode	By screws
Electrical connection	Lubricated sliding contact
Standards	IEC 61439-6 IEC 60439-2
Width	147 mm
Depth	60 mm
Length	Side 3: 250...695 mm Side 1: 250...745 mm
Colour	White (RAL 9001)
Net weight	8.4 kg

Environment

IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	44 kg
Package 1 Height	77.5 cm
Package 1 width	77.9 cm
Package 1 Length	92 cm


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant  EU RoHS Declaration
Toxic heavy metal free	Yes

Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Halogen content performance	Halogen free product

Contractual warranty

Warranty	18 months
----------	-----------

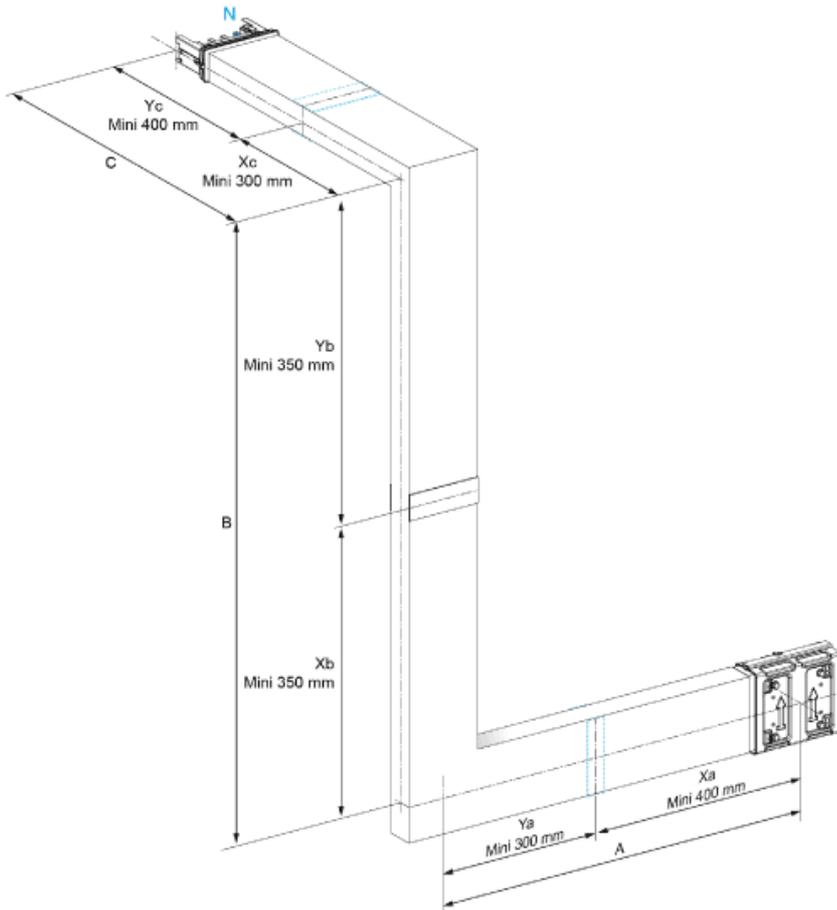

Dimensions KSA250DMBL4CF

A (mm)	-
B (mm)	-
C (mm)	-
D (mm)	-
Fire barrier	Yes
Fire barrier position	Either on side A or B or C