


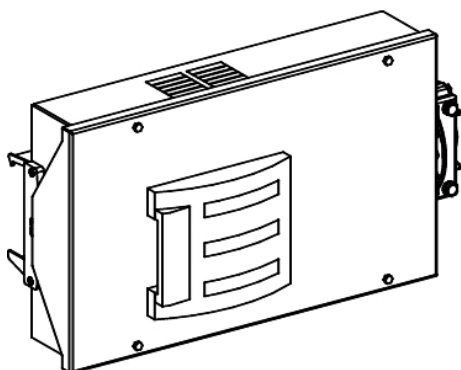

Main

Range of product	Canalis
Range compatibility	KS busbar trunking
Product or component type	Tap-off unit
Busbar trunking compatibility	Canalis KS busbar trunkingplug-in
[I _e] rated operational current	250 A at 35 °C
Protection type	Fuse isolator: Efen fuse, size 1 conforming to DIN
Provided equipment	Fuse to be ordered separately
Mounting mode	Plug-in with fixed polarity
Tap-off unit polarity	3L+N+PE
Colour	White (RAL 9001)

Complementary

Device application	Medium power distribution
[U _{imp}] rated impulse withstand voltage	6.8 kV
Network frequency	50/60 Hz
Electrical connection	Cable clamp terminal - ISO63 185 mm ² flexible Cable clamp terminal - ISO63 185 mm ² rigid
Door/cover opening side	Right
Tap-off unit disconnection mode	By opening the door
Standards	IEC 61439-1 IEC 61439-6
Body material	Metal
Width	587 mm
Depth	120 mm
Depth (door open)	763 mm
Height	350 mm
Net weight	9 kg

Environment

Earthing system	TT TN-S IT
IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	9 kg
Package 1 Height	12 cm
Package 1 width	34.8 cm
Package 1 Length	57.3 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Compliant  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------

