



Main

Range of product	Harmony XVR
Product or component type	Prewired rotating mirror beacon
Sound signalling	Without
Device short name	XVR
Mounting diameter	84 mm
IP degree of protection	IP65 (with accessory) conforming to IEC 60529 IP23 conforming to IEC 60529
[Us] rated supply voltage	24 V AC/DC
Light source	High luminosity LED, orange

Complementary

Material	ABS (acrylonitrile butadiene-styrene): body part PC: globe
CAD overall width	84 mm
CAD overall depth	84 mm
Net weight	0.3 kg
Marking	CE
Product mounting	By 3 M4 screws
Supply voltage limits	19...30 V DC 21.6...26.4 V AC
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	125 mA
Flashing frequency	2.3 Hz
Clamping connection capacity	0.83 mm ²
AWG gauge	AWG 18
Cable length	500 mm

Environment

Standards	EN 61000-6-4 EN 61000-6-2
Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	-10...50 °C
Electrical shock protection class	Class II conforming to IEC 61140

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	390 g
Package 1 Height	10 cm
Package 1 width	10 cm
Package 1 Length	19.5 cm
Unit Type of Package 2	S03
Number of Units in Package 2	6

Package 2 Weight	3.376 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------

Rotating Mirror Beacon

Dimensions

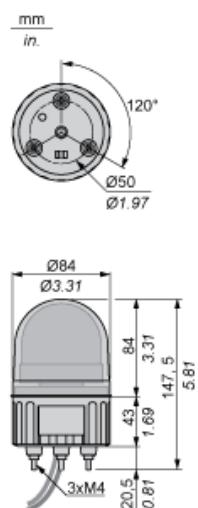

Rotating Mirror Beacon

Panel Cut-out

