

# ZB6DE1

Head for illuminated push button, Harmony XB6, white rectang projecting pushbutton Ø 16  
spring return 12...24 V



## Main

|                               |                                  |
|-------------------------------|----------------------------------|
| Range of product              | Harmony XB6                      |
| Product or component type     | Head for illuminated push-button |
| Product compatibility         | Integral LED                     |
| Device short name             | ZB6                              |
| Bezel material                | Plastic                          |
| Mounting diameter             | 16 mm                            |
| Sale per indivisible quantity | 1                                |
| Shape of signaling unit head  | Rectangular                      |
| Type of operator              | Spring return                    |
| Operator profile              | White projecting, unmarked       |

## Complementary

|                    |          |
|--------------------|----------|
| CAD overall width  | 24 mm    |
| CAD overall height | 18 mm    |
| CAD overall depth  | 36 mm    |
| Net weight         | 0.016 kg |

## Environment

|                                       |                                                                                                                                                                                                                    |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Protective treatment                  | TC                                                                                                                                                                                                                 |
| Ambient air temperature for storage   | -40...70 °C                                                                                                                                                                                                        |
| Ambient air temperature for operation | -25...70 °C                                                                                                                                                                                                        |
| Electrical shock protection class     | Class II conforming to IEC 61140                                                                                                                                                                                   |
| IP degree of protection               | IP65 conforming to IEC 60529                                                                                                                                                                                       |
| NEMA degree of protection             | NEMA 13 conforming to UL 50<br>NEMA 4 conforming to UL 50<br>NEMA 4X conforming to UL 50<br>NEMA 4 conforming to CSA C22.2 No 94<br>NEMA 4X conforming to CSA C22.2 No 94<br>NEMA 13 conforming to CSA C22.2 No 94 |
| Standards                             | EN/IEC 60947-5-1<br>EN/IEC 60947-1<br>JIS C 852<br>CSA C22.2 No 14<br>JIS C8201-5-1<br>EN/IEC 60947-5-5<br>UL 508<br>JIS C8201-1                                                                                   |
| Product certifications                | GOST<br>UL<br>CSA<br>CCC                                                                                                                                                                                           |
| Vibration resistance                  | +/- 3 mm (f= 2...500 Hz) conforming to IEC 60068-2-6<br>5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6                                                                                                           |
| Shock resistance                      | 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27<br>50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27                                     |

## Packing Units

|                  |          |
|------------------|----------|
| Package 1 Weight | 0.017 kg |
| Package 1 Height | 0.800 dm |
| Package 1 width  | 0.210 dm |
| Package 1 Length | 0.640 dm |

## Offer Sustainability

|                            |                                                                                                                                                                                    |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                                                                              |
| REACH Regulation           | <a href="#"> REACH Declaration</a>                                                                |
| REACH free of SVHC         | Yes                                                                                                                                                                                |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#"> EU RoHS Declaration</a> |
| Toxic heavy metal free     | Yes                                                                                                                                                                                |
| Mercury free               | Yes                                                                                                                                                                                |
| RoHS exemption information | <a href="#"> Yes</a>                                                                              |
| China RoHS Regulation      | <a href="#"> China RoHS Declaration</a>                                                           |
| Environmental Disclosure   | <a href="#"> Product Environmental Profile</a>                                                    |
| Circularity Profile        | <a href="#"> End Of Life Information</a>                                                          |

## Contractual warranty


|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

---

Rectangular Head for Illuminated or Non Illuminated Pushbutton


---

Dimensions

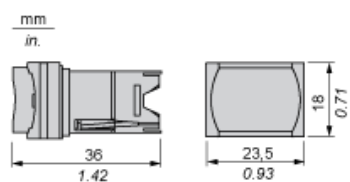


## Panel Cut-out

### For Rectangular Head




## Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

### Front Panel Cut-out (Viewed from Installer's Side)

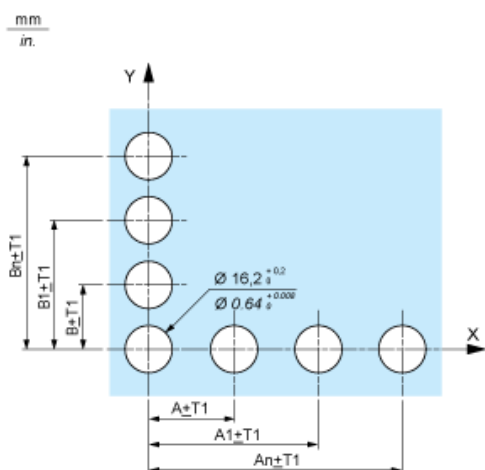

## Printed Circuit Board Drillings (Viewed from Electrical Block Side)

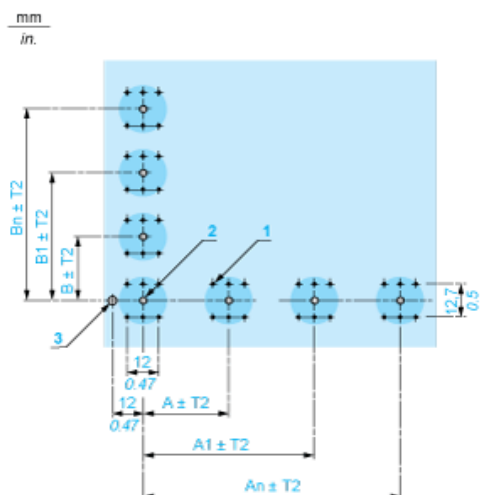

A 24 mm/0.94 in. minimum for rectangular heads, 18 mm/0.71 in. minimum for square or circular heads

B 18 mm/0.71 in. minimum

(1) 6 x Ø 1.1 mm / 6 x Ø 0.04 in. holes.

(2) 1 x Ø 2.6<sup>0</sup><sub>-0.2</sub> mm / 1 x Ø 0.10<sup>0</sup><sub>-0.008</sub> in. hole for locating pin, only when using socket adaptor ZB6Y010.

(3) 1 x Ø 3.2<sup>0</sup><sub>-0.2</sub> mm / 1 x Ø 0.13<sup>0</sup><sub>-0.008</sub> in. hole for fixing of printed circuit board onto the front panel using body bracket ZB6Y011.  
This hole must be drilled on the left-hand side, when heads are positioned at the normal angle. Fit a body bracket ZB6Y011 every 72 mm/2.83 in. maximum for cut-outs on 24 mm/0.94 in. centres (rectangular heads) and 54 mm/2.13 in. maximum for cut-outs on 18 mm/0.71 in. centres (square or circular heads).


General tolerances of the panel and printed circuit board: T1, T2: T1 + T2 = 0.3 mm/0.01 in. maximum.

Installation precautions:

Thickness of printed circuit board: 1.6 mm/0.06 in. minimum.

## Mounting with Body Bracket

With socket adaptor ZB6Y010

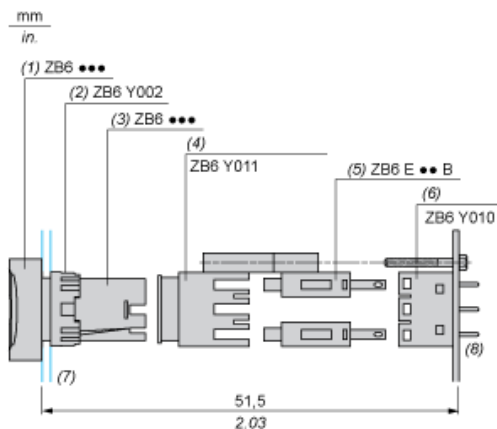

(1) Head

(2) Nut

(3) Body

(4) Body bracket


(5) Contact block

(6) Socket adaptor

(7) Panel

(8) Printed circuit

## Direct mounting without socket adaptor ZB6Y010

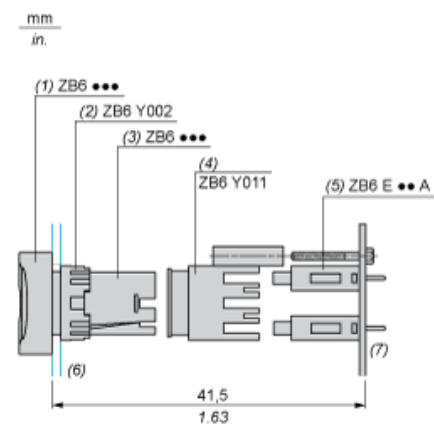

- (1) Head
- (2) Nut
- (3) Body
- (4) Body bracket
- (5) Contact block
- (6) Panel
- (7) Printed circuit