


03911

FRONT PLATE WITH 3 CUT-OUT

96x96METERING DEV/P-BUTTON WIDTH

600/650 3M

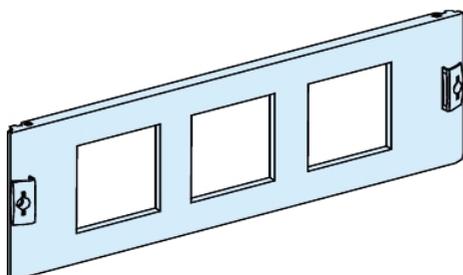

Main

Range	Prisma
Range of product	Prisma G Prisma P
Product or component type	Front plate
Accessory / separate part category	Installation accessory
Range compatibility	Prisma G enclosure Prisma P cubicle
Type of front plate	Cut-out
Type of front plate	Cut-out
Installed device	Vigilohm: IM20 Vigilohm: IM20H Human-switchboard interface: 96 x 96 mm device Human-switchboard interface: HSI PowerLogic: PM400...800 Vigilohm: IM10 Vigilohm: IM10H Enerlin'X: FDM121

Complementary

Enclosure/cubicle description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Cubicle - width 650 mm depth 400 mm
Number of vertical modules [50 mm]	3
Standards	IEC 61439-2 IEC 61439-1
Product certifications	ASEFA
Material	Steel
Surface finish	Matt Smooth
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Colour	White (RAL 9001)
Height	150 mm
Width	500 mm
Net weight	0.46 kg
Quantity per set	Set of 1
Functional unit	600 mm Prisma G floor-standing enclosure human-switchboard interface 96 x 96 mm device 3 3 600 mm Prisma G wall-mounted enclosure human-switchboard interface 96 x 96 mm device 3 3 650 mm 400 mm Prisma P cubicle human-switchboard interface 96 x 96 mm device 3 3 600 mm Prisma G floor-standing enclosure human-switchboard interface HSI 3 3 600 mm Prisma G wall-mounted enclosure human-switchboard interface HSI 3 3 650 mm 400 mm Prisma P cubicle human-switchboard interface HSI 3 3 600 mm Prisma G floor-standing enclosure PowerLogic 3 3 600 mm Prisma G wall-mounted enclosure PowerLogic 3 3 650 mm 400 mm Prisma P cubicle PowerLogic 3 3 650 mm 400 mm Prisma P cubicle Vigilohm 3 3 600 mm Prisma G floor-standing enclosure Enerlin'X FDM121 3 3 600 mm Prisma G wall-mounted enclosure Enerlin'X FDM121 3 3 650 mm 400 mm Prisma P cubicle Enerlin'X FDM121 3 3

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	500 g
Package 1 Height	3 cm
Package 1 width	16 cm
Package 1 Length	51 cm
Unit Type of Package 2	CAR
Number of Units in Package 2	10
Package 2 Weight	5.25 kg
Package 2 Height	17.5 cm
Package 2 width	17 cm
Package 2 Length	53 cm
Unit Type of Package 3	P12
Number of Units in Package 3	90
Package 3 Weight	45.52 kg
Package 3 Height	80 cm
Package 3 width	80 cm
Package 3 Length	120 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Halogen content performance	Halogen free plastic parts product